


PFX-3134

LED WALL PACK

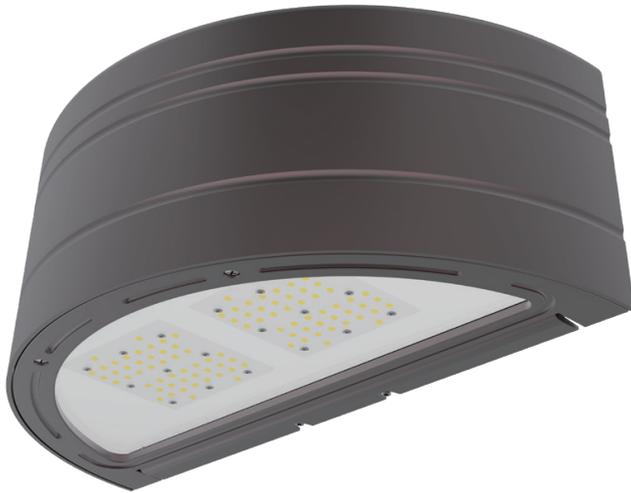


PRODUCT FEATURES

Traditional Impact & weather resistant fixture with die cast aluminum housings and glass lenses. 30W/60W/80W field adjustable and 3000K/4000K/5000K field adjustable. Universal mounting plate with easy wall mount installation. 0-10V dimming as standard. Name brand chip and high quality driver @ 5 year.

PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	80W
LUMENS	3750LM/7500LM/10000LM
EFFICACY	UP TO 125LPW
INPUT VOLTAGE	120-277V
CCT	CCT ADJUSTABLE
CRI	>70
WEIGHT	13.5lbs
AMBIENT TEMP.	-30-40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5Years

PRODUCT DIMENSIONS

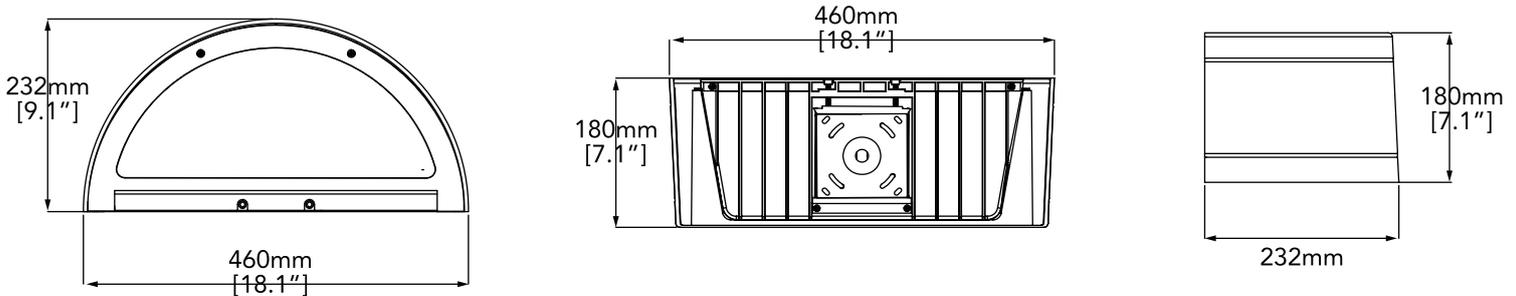

ORDERING GUIDE

SAMPLE PART # PFX-3134-80W-ACL-V8-D-PC-S1-BZ

Model No.	Tunable Wattage	Adjustable CCT	Voltage	Dimming Option	Options	Surge Protector	Housing Finish
PFX-3134	80W	ACL CCT ADJUSTABLE	V8 120-277V	D DIMMING	PC PHOTOCELL	S1 SURGE PROTECTOR NA NONE	BZ BRONZE

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.