

# GRIDLITE

LOW-PROFILE LINEAR LED LUMINAIRE



PROJECT  
NOTES

DATE TYPE

REV: 02 2020



**LOW PROFILE, ALUMINUM HOUSING & HEATSINK**

Measuring Less than 0.4 - Inch Tall this Low Profile Luminaire Utilizes a Robust Aluminum Frame for Linear Mounting & Heat Dissipation

**HIGH OUTPUT LED PERFORMANCE**

Up to 120 Lumens per Watt

**0-10 VOLT DIMMING STANDARD**

**120-277V STANDARD**

**PRODUCT APPLICATIONS**

- Offices
- Showrooms
- Conference Rooms
- Hallways
- Classrooms
- Museums
- Lobbies
- Libraries

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE		Sample Part # GL - 2 - 10W - 30K - WH		
MODEL	LENGTH	WATTAGE	COLOR TEMPERATURE (CCT)	LENS
GL	2 FEET	10W 10 WATTS	30K 3000K - WARM WHITE	WH WHITE
	4 FEET	20W 10 WATTS	35K 3500K - NEUTRAL WHITE	
			40K 4000K - NEUTRAL WHITE	
			50K 5000K - COOL WHITE	


ORDERING GUIDE		Sample Part # GL - PS60W
MODEL	POWER SUPPLY	
GL	PS60W 60-WATT	
	PS96W 96-WATT	

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMEN	EFFICACY	LENGTH	CRI
10W	9.70W	3000K	1,154.4 LM	119.0	23.4"	>80
10W	9.68W	3500K	1,157.0 LM	119.5	23.4"	>80
10W	9.68W	4000K	1,157.0 LM	119.5	23.4"	>80
10W	9.68W	5000K	1,157.0 LM	119.5	23.4"	>80
20W	19.38W	3000K	2,306.4 LM	119.0	47.2"	>80
20W	19.38W	3500K	2,316.8 LM	119.5	47.2"	>80
20W	19.38W	4000K	2,316.8 LM	119.5	47.2"	>80
20W	19.38W	5000K	2,316.8 LM	119.5	47.2"	>80

POWER SUPPLY	MAX LUMINAIRES
60W	(6) 2-FT - (3) 4-FT
96W	(8) 2-FT - (4) 4-FT

**PRODUCT DIMENSIONS**

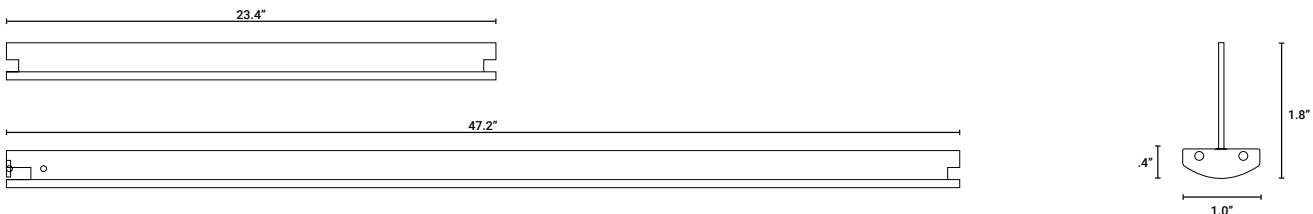

# GRIDLITE


LOW-PROFILE LINEAR LED LUMINAIRE

**PARAFLEX**  
Fast Flexible Focused Lighting

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

## PRODUCT SPECIFICATIONS (CONT.)

### WIRING DIAGRAM

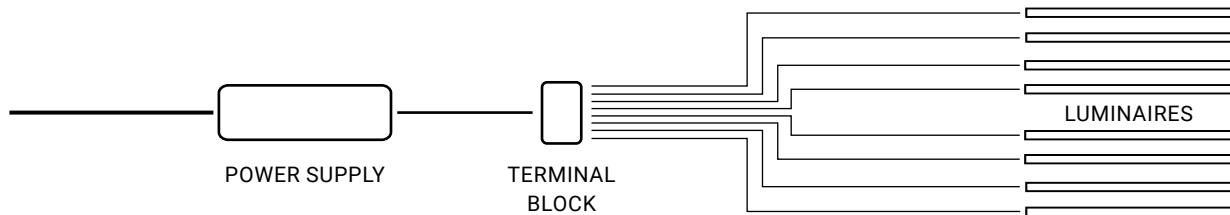

### PRODUCT COMPONENTS

- 2' LUMINAIRE**  
 (2) Hook Mount Connectors Pre-Installed  
 (2) Slot Mount Connectors Provided  
 (1) 4' of Connection Wire With Plug

- 4' LUMINAIRE**  
 (2) Hook Mount Connectors Pre-Installed  
 (2) Slot Mount Connectors Provided  
 (1) 6' of Connection Wire With Plug


- POWER SUPPLY**  
 (1) 60W or 96W 0-10V Power Supply  
 (1) 8-Port Terminal Block  
 (1) Driver to Terminal Block Cable

### ACCESSORIES


#### ADDITIONAL CONNECTION KIT: GL-CK

- (1) 16' Connection Wire  
 (8) Wire Nuts

### MOUNTING TYPES




HOOK GRID




SLOT GRID

### PHOTOMETRIC DATA

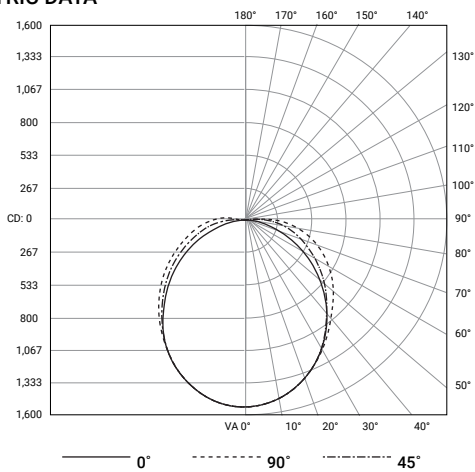

2-FT 10W LUMINAIRE  
1,150 LUMENS

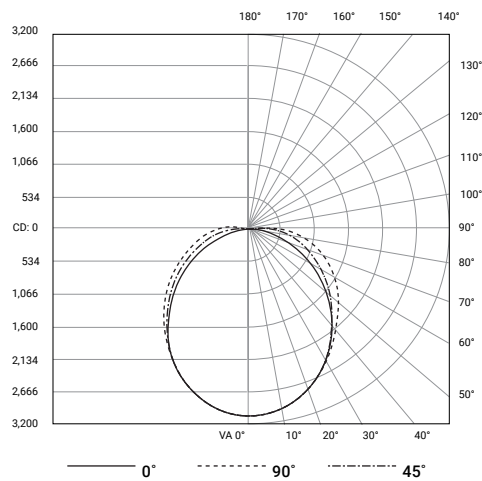

4-FT 20W LUMINAIRE  
2,300 LUMENS

FOR ADDITIONAL INFORMATION PLEASE DOWNLOAD IES FILES FROM WEBSITE


# GRIDLITE

LOW-PROFILE LINEAR LED LUMINAIRE

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

## PRODUCT SPECIFICATIONS (CONT.)

### LAYOUT DIAGRAM

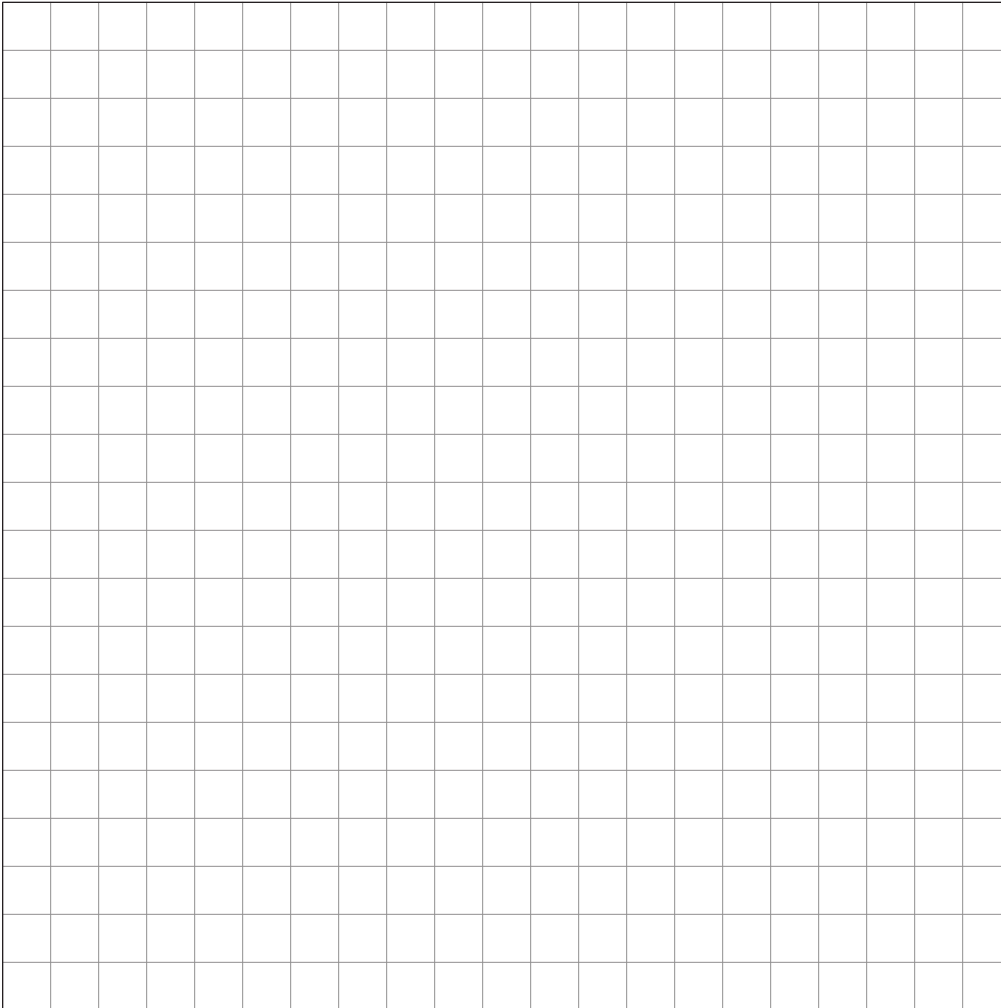

Drawing Scale: Each Square Represents a 2'x2' Ceiling Tile

### DESIGN GUIDE

1. OUTLINE THE SPACE
2. LAYOUT THE LIGHTS
3. EMAIL THIS PAGE TO PARAFLEX FOR LAYOUT ASSISTANCE AND QUOTATION

EMAIL PARAFLEX DESIGN TEAM

Project Name

Project Application

Ceiling Type

Installation Date

Project Notes

### LIGHTING SCHEDULE

QUANTITY	LUMINAIRE PART #	NOTES
QUANTITY	LUMINAIRE PART #	NOTES
QUANTITY	POWER SUPPLY PART #	NOTES
QUANTITY	POWER SUPPLY PART #	NOTES
QUANTITY	ACCESSORY PART #	NOTES

FOR ADDITIONAL INFORMATION PLEASE DOWNLOAD IES FILES FROM WEBSITE