

# PFX-3109

LED WALL PACK LUMINAIRE



## FEATURES

### COMPACT, HEAVY-DUTY HOUSING

The DC102 is a Small 9" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC102 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components


### 120-277V STANDARD TYPE IV DISTRIBUTION

### OPERATING TEMPERATURE -20C TO 40C

### PRODUCT APPLICATIONS

- Building Entrances
- Bridges
- Walkways
- Catwalks
- Tunnels
- Stairwells
- Loading Docks
- Building Exteriors

## DIMENSION (INCHES)

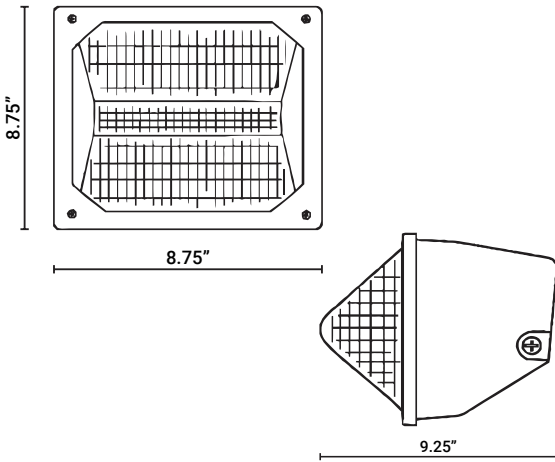

## SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC 5.0V LISTING
12W	12.72	3000K	1,393.50	109.55	NONE
12W	12.72	4000K	1,463.18	115.03	NONE
12W	12.72	5000K	1,536.33	120.78	NONE
24W	23.57	3000K	2,787.00	118.24	NONE
24W	23.57	4000K	2,926.35	124.16	NONE
24W	23.57	5000K	3,072.67	130.36	STANDARD
36W	34.27	3000K	4,180.50	121.99	STANDARD
36W	34.27	4000K	4,389.53	128.09	STANDARD
36W	34.27	5000K	4,609.00	134.49	STANDARD

## ORDERING GUIDE

Sample Part # PFX-3109 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PFX-3109	12W 12 WATTS	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W 24 WATTS	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W 36 WATTS	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
		40K 4000K - NEUTRAL WHITE	SL SILVER	MS-D2 MOTION SENSOR WITH BILEVEL DIMMING
		50K 5000K - COOL WHITE	CC CUSTOM COLOR	D1 0-10V DIMMING
		57K 5700K - DAYLIGHT		D2 STEP DIMMING (120V ONLY)
				V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

**Disclaimer:**

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.