

Model Number

PFX-5511 New York City Compliant
Diecast Aluminum Exit Sign

Project:	
Type:	
Catalog #:	



STANDARD



OPTIONAL

ILLUMINATION

- Ultra bright, energy efficient, long life red LEDs.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Premium-grade, aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

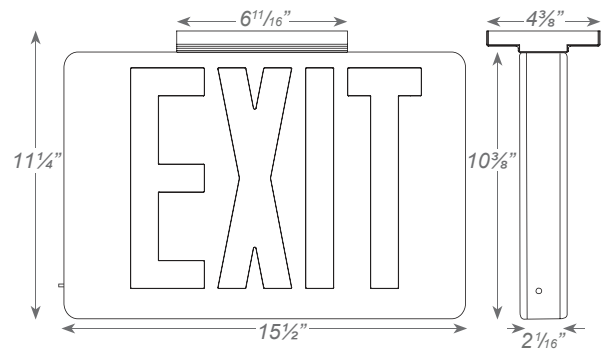

ORDERING INFORMATION

Sample Part Number: **PFX5511NYKXTEU1RBAEM**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	FACE PANEL	BATTERY	OPTIONS	
PFX5511 NYKXTEU	1	Single Face	R Red	W White	W White	(blank) AC-Only	SDT Self-Diagnostics ¹
	2	Double Face		B Black	B Black	EM Battery Backup	
	3	Universal Single/ Double face		A Aluminum	A Aluminum		

¹ Available only with EM units.

Model Number

PFX-5511

New York City Compliant
Diecast Aluminum Exit Sign

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
PFX5511NYKXTEU/EM	5.0	5.0	0.041	0.018