

PFX-3152

FULL CUTOFF WALL PACK



DESCRIPTION

Combined with a comprehensive variety of battery backup, controls, and other options to meet your specification or building code and available in two sizes, full cutoff wall pack is designed for perimeter illumination for safety, security and identity. Units have protective polyester finish for long lasting appearance. Ideal for schools, factories, hospitals, warehouses and retail applications.

FEATURES

Construction

- Rugged cast-aluminum housing with bronze polyester powder paint for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and long life.
- The design with zero uplight meets the requirements of dark sky.

Optics

- Switchable color temperature 3000K/4000K/5000K.
- Adjustable lumen output with four lumen settings 100%, 80%, 60%, 40%.
- Scalable Lumen Packages from 4,100 to 20,000 Lumens.
- Tempered UV coated flat lens provide outstanding performance, uniformity and glare control.

Electrical

- Universal 120-277 VAC input voltage.
- 0-10V dimming standard for a dimming range of 100% to 10%.
- Both drivers have a power factor >90%, THD <20%.
- Operating Temperature Range: -40°C to 45°C.

Controls

- Optional occupancy sensor.
- Optional photocell.
- Optional Emergency Battery.

Lifespan

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

Warranty

- Five-year limited warranty.

Certifications

- UL cUL wet location listed.

Note


- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C(+5°C) specifications subject to change without notice.



Medium Size 70W & 125W

Large Size 135W

PHOTOMETRIC



ACCESSORIES



Photocell

Description: Photocell is field installed or pre-installed in factory by requesting



PIR Sensor, 120-277V

USE: Sensor can be pre-installed in factory or field installed



Emergency Battery Backup

Description: It can be pre-installed in factory or field installed 8W 900lm 90min Only suitable for 70W/135W.



CCT and Wattage controller

Description: Allowing the contractor to set the lumen value and CCT of the fixture at the installation site.



CCT AND WATTAGE CONTROLLER

This fixture has the function of adjusting the lumens output and color temperature on-site.

Wattage selectable: 100%, 80%, 60%, 40%
CCT selectable: 3000K, 4000K, 5000K

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3152

FULL CUTOFF WALL PACK



PERFORMANCE DATA

PFX-3152 70W								
SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	70W	70	9800lm	140lm/W	11000lm	157lm/W	10200lm	146lm/W
80%	56W	70	8200lm	146lm/W	9100lm	163lm/W	8700lm	155lm/W
60%	42W	70	6400lm	152lm/W	7000lm	167lm/W	6800lm	162lm/W
40%	28W	70	4400lm	157lm/W	4800lm	171lm/W	4700lm	168lm/W

PFX-3152 125W								
SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	125W	70	17100lm	137lm/W	19000lm	152lm/W	18000lm	144lm/W
80%	100W	70	14200lm	142lm/W	15700lm	157lm/W	15000lm	150lm/W
60%	75W	70	11000lm	147lm/W	12100lm	161lm/W	11700lm	156lm/W
40%	50W	70	7600lm	152lm/W	8200lm	164lm/W	8100lm	162lm/W

PFX-3152 135W								
SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	135W	70	19000lm	141lm/W	20000lm	148lm/W	19400lm	144lm/W
80%	108W	70	15700lm	145lm/W	16400lm	152lm/W	16000lm	148lm/W
60%	81W	70	12000lm	148lm/W	12600lm	156lm/W	12300lm	152lm/W
40%	54W	70	8200lm	152lm/W	8600lm	159lm/W	8400lm	156lm/W

ORDERING GUIDE

Example: PFX-3152 70W 27V DDK Y Y Y Y Y

Fixture Type	Wattage	Voltage	CCT	Finish	Photocell (Option)	Sensor (Option)	Emergency Battery (Option)	CCT and Power Adjustable	Internal Code
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PFX-3152 Wall Pack Series	70 70W 125 125W 135 135W	27V 120-277V	DDK Adjustable color temperature	D Dark Bronze B Black W White	P0 120-277V Photocell Blank Without Photocell	M With Sensor Blank Without Sensor	B Emergency Battery Blank Without Emergency Battery	AD With adjustment dial	Blank Alphanumeric

Note : Emergency Battery only suitable for 70W/135W.

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3152

FULL CUTOFF WALL PACK






ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	1750	70	120	0.58
		70	208	0.34
		70	240	0.29
		70	277	0.25
1	1100	125	120	1.04
		125	208	0.60
		125	240	0.52
		125	277	0.45
1	3260	135	120	1.13
		135	208	0.65
		135	240	0.56
		135	277	0.49

DIMENSIONS




unit: mm/inch

Medium Size:
70W&125W



Net Weight
70W: 7.21lb
125W: 7.68lb

Large Size:
135W

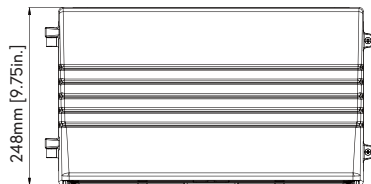

Net Weight
135W: 10.47lb

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.