



# 9&12&18&24&36” Premium Swivel Under Cabinet Light Installation Instructions



A

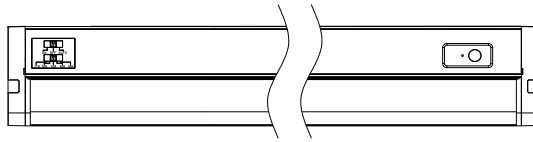

B



C



D



E



F



G

## PACKAGE CONTENTS

SURFACE MOUNT					
PART	DESCRIPTION	QUANTITY	PART	DESCRIPTION	QUANTITY
A	9&12&18&24&36 5CCT Under Cabinet Light	1	E	Screw	2
B	Connection Strain Relief	1	F	Connection cable (optional)	1
C	End-to-end Connector	1	G	Plug wire (optional)	1
D	Wire Nut	1			

## UNPACKING

Thoroughly inspect the fixture for freight damage. Freight damage should be reported to the delivery carrier.

## DIMMER RECOMMENDATION

This unit may operate on other dimmers we haven't tested with. (Input 120V 60Hz)

LEVITON	6672, RNL06
LUTRON	TG-600PR-WH, CTCL-153PDH-WH, TGCL-153PH-LA,SLV-600P-AL, DVCL-153P, MSCL-OP153M,PD-6WCL,CT-103RP-WH, DVWCL-153PH, RCL-153RNL

## IMPORTANT

Please read carefully and save these instruction, as you may need them at a later date. When using electrical equipment, basic safety precautions should always be followed as below:







## READ AND FOLLOW BELOW SAFETY INSTRUCTIONS

GENERAL: All electrical connections must be in accordance with local and National Electrical Code (N.E.C)standards. If you are unfamiliar with connections obtain the services of a qualified electrician.



- Risk of fire or electric shock.
- Disconnect main power at fuse or circuit breaker before installing or servicing the fixture.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit Installation.
- To prevent wiring damage or abrasion do not expose wiring to edges of sheet metal or other sharp objects.
- This device is not intended for use with emergency exit.
- This fixture is 5%-100% dimmable. Please refer to a compatible dimmer list.
- Suitable for Damp Locations.
- To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.

## INSTALLATION STEPS

1. Cover the front surface of the lamp with a straight screwdriver. Leave a gap and open the cover, Fig1.
2. Choose the appropriate knock off hole, Open the knock off hole and install the 3/8 cable clamp. Secure the cable clamp with the matching nut, Fig2.
3. Connect the power and ground wires, Fig3.
4. Organize the cables and tighten them tightly, Buckle up the cabinet light cover, Fig4.
5. Remove the installation hole plug, use a Phillips screwdriver to pass through both ends of the lamp, and reserve screws to fix the lamp to the cabinet, Fig5, Fig6.





1. Open the cover, Fig7.
  2. Use a screwdriver and M4 screws to fix the light fixture to the cabinet through the gourd hole on the fixture, Fig8.
- \* The above installation plan is applicable to 24 inch/36 inch cabinet lights.



## LAMP SPLICING METHOD

1. Seamless splicing and wiring methods for lighting fixtures Wiring and splicing methods for lighting fixtures, Fig9, Fig10.



## POWER SUPPLY METHOD

1. Remove the wiring hole plug (you can choose to wire the left or right end of the lamp), Fig11.
2. Connect the power cord to the input terminal of the lighting fixture through a plug-in connection, Fig12.

