

PFX-3125
CYLINDRICAL WALL PACK UP/DOWN




SPECIFICATION

Introducing the PFX3125 Cylinder - the perfect lighting solution for any space. With its sleek and modern design, this cylinder light adds a touch of elegance to any room. The PFX3125 Cylinder features both up and down lighting, providing optimal illumination to any space.

In addition, the PFX3125 Cylinder is customizable with its 3 CCTs (color temperature) and 4 selectable power options. This allows you to choose the perfect lighting for your specific needs, whether you need bright, white light for a workspace or warm, cozy lighting for a living area.

The PFX3125 Cylinder is also energy efficient, ensuring that you save money on your electricity bill while still enjoying high-quality lighting. This cylinder light is easy to install and can be used in a variety of settings, including homes, offices, and public spaces. Invest in the PFX3125 Cylinder and enhance the lighting in your space. With its versatility, energy efficiency, and modern design, this cylinder light is a must-have for any interior design project.

DIMENSION (INCHES)

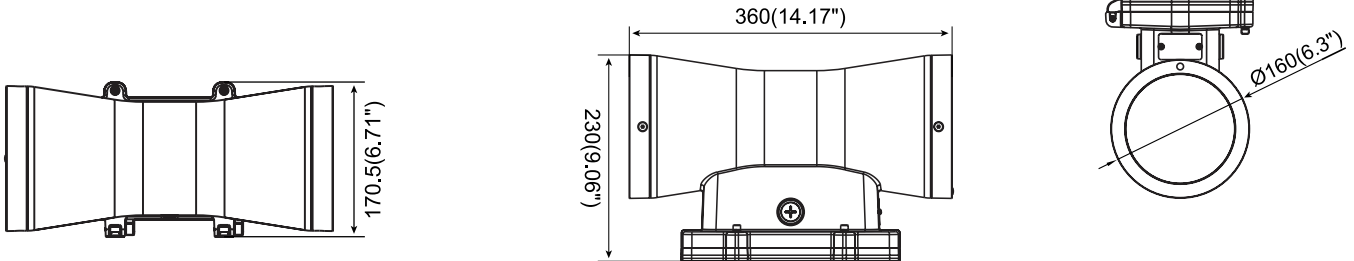

ORDERING GUIDE

Sample Part PFX-3125

Model No.	System Watts	Input Voltage	CRI	Color Temp	Color Temp	Beam Angle	Photocell Optional	Finish	Starting Temp
PFX 3125-060	MAX. 60W 100% 75% 50% 30% Selectable	UNV=120-27 7V	8=80+	3000K 4000K 5000K Selectable	D=0-10V	30°	N/A	BZ=Bronze BL=Black	-30°C to +50°C
PFX 3125-060	As Above	As Above	As Above	4000K	As Above	15°	N/A	As Above	As Above

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3125

CYLINDRICAL WALL PACK UP/DOWN



PERFORMANCE DATA

Model No.	System Watts	Lumens	LPW
PFX 3125-060 (100%)	60W	6600lm	110lm/w
PFX 3125-060 (75%)	45W	4950lm	110lm/w
PFX 3125-060 (50%)	30W	3300lm	110lm/w
PFX 3125-060 (30%)	18W	1980lm	110lm/w


PRODUCT DESCRIPTION




LIGHT DISTRIBUTION



3 CCTS SELECTABLE

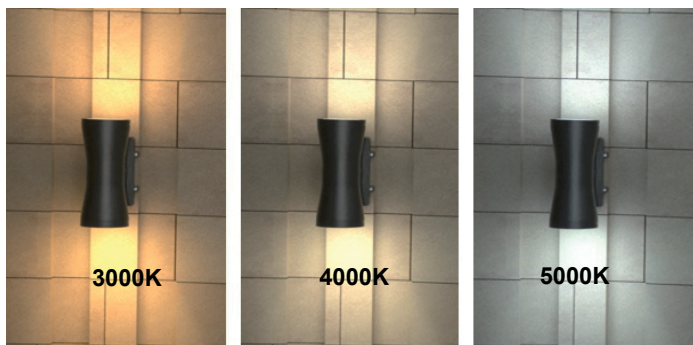

PHOTOMATRIC DIAGRAM

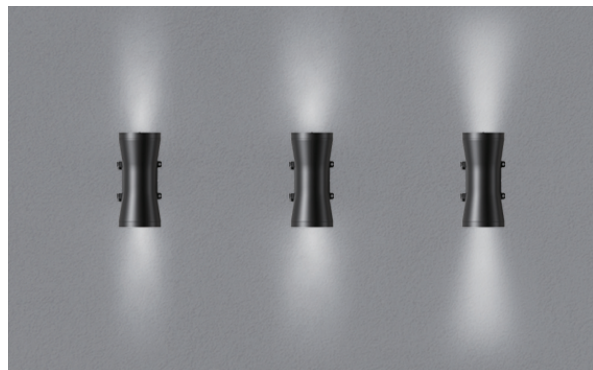

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3125

CYLINDRICAL WALL PACK UP/DOWN



DIMENSION AND MOUNT

Product Dimension (mm / inch)	360×230×170.5 / 14.17×9.06×6.71
Luminaire Net Weight (kg / lbs)	4.3 / 9.48
Export Carton Size (mm / inch)	430×300×255 / 16.93×11.81×10.04
Gross Weight (kg / lbs)	5 / 11.02
Mounting Option	Wall mounting
Material	Aluminum alloy
	PMMA lens
	Glass
Finish	Powder coating
Fixture Color	Black (RAL 9017)
EPA	NA
IK Rating	IK08
IP Rating	IP66

* The tolerance for weight is ±6%.

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.