

PFX-3158

LED WALL PACK LIGHT



Features

HEAVY DUTY HOUSING

The PFX-3158 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The PFX-3158 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

OPERATING TEMPERATURE -20C TO 40C

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

Specifications

- Wattage switchable : 45W/60W/8W
60W/80W/100W
80W/100W/120W
- CCT switchable: 3500K/4000K/5000K
- 0-10V dimmable
- Waterproof: IP65
- PF > 0.90 , CRI > 80
- Input voltage: AC120-277V
- Lumen : 140Lm/W

Accessories


- Motion sensor, wire guard and photocell for option.

Certifications

- DLC 5.1 premium.
- Comply with the requirements of the Standard(s) for Luminaires and are identified with the cETL Listed Mark.



DIMENSIONS

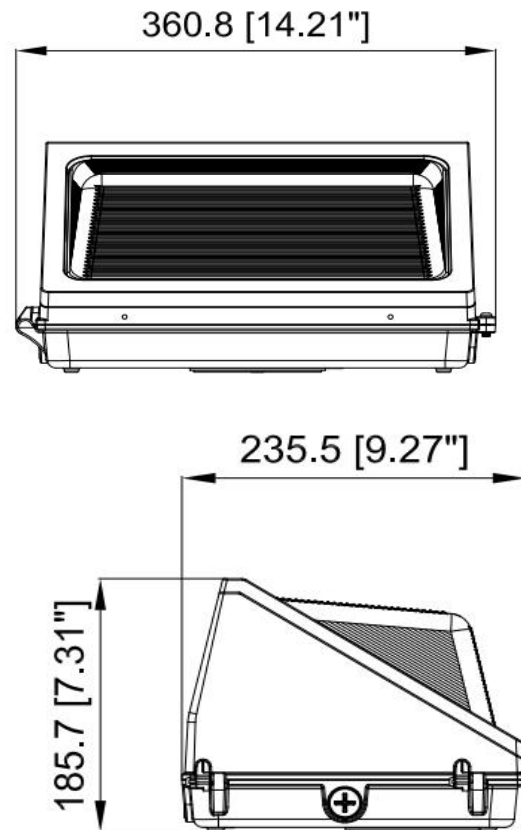

Disclaimer: Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3158

LED WALL PACK LIGHT



SPECIFICATION

	MODEL	WATT	CCT	EFFICACY
<input type="checkbox"/>	PFX3158-WP45/60/80W-3545K-A	45W/60W/80W switchable	3500K/4000K/500 0K switchable	140Lm/W
<input type="checkbox"/>	PFX3158-WP60/80/100W-3545K-A	60W/80W/100W switchable	3500K/4000K/500 0K switchable	140Lm/W
<input type="checkbox"/>	PFX-3158-WP80/100/120W-3545K-A	80W/100W/120W switchable	3500K/4000K/500 0K switchable	140Lm/W

ACCESSORIES (order separately)

Wire Guard



Button Type Photocell

Button Type Photocell

- IP65 protection rating for outdoor use.
- AUTO ON/OFF - automatically turn the lights on at dusk and off at dawn.
- High quality material shell protects the photocell against damaged by rain or dust, assures long-term using.

Wire Guard

- To protect the glass cover from impact of external force.
- Perfect fit for wall pack
- Material: Steel



PACKING INFO

4PCS/CARTON (1PC/BOX)			PALLET		CONTAINER		
DIMENSION(INCH)	N.W(LBS)	G.W(LBS)	PCS	CTNS	20'GP(PCS)	40'GP(PCS)	40HQ(PCS)
24.02"x16.14"x19.69"	35.01	44.09	80	20	894	1854	2174

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.


PFX-3158

LED WALL PACK LIGHT




INSTALLATIONS


1. Use a screw driver to unscrew the lamp screws and remove the upper half of the fixture.

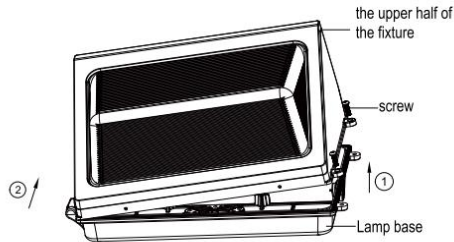


2. Unscrew the cover of the entry hole on the lamp base and remove the cover.

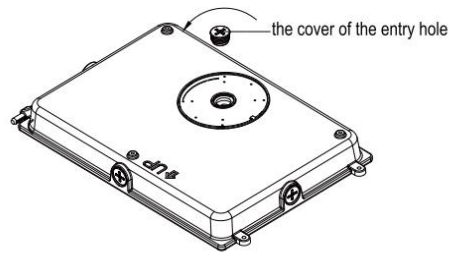


3. According to the embedded terminal box, punch the corresponding mounting hole on the light's mount.

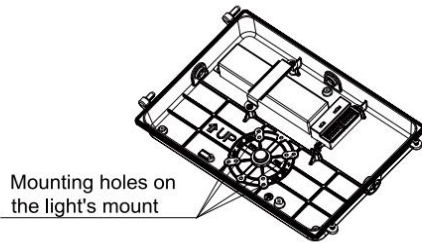


4. Put the input line in the embedded box passes through the waterproof pad and then passed through the lamp base.

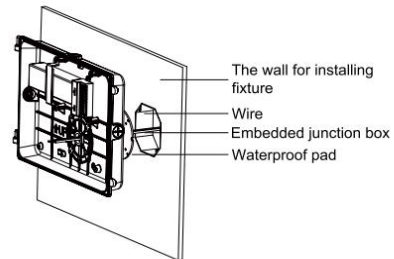


5. Use screw to lock the lamp base on the embedded junction box.




6. Connect the input wire and the dimming wire of the light, then put the connected wires into the embedded terminal box.



7. Connect the output wires of driver with the wires of PCB board.

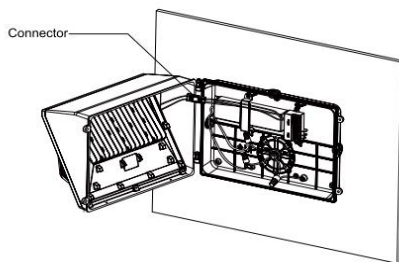

8. Use screws to lock the fixture. Installation completed.



Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



PFX-3158

LED WALL PACK LIGHT





PHOTOMETRIC DATA



PFX3158-WP45/60/80W-3545K-A	
Minimum Watt	45 W
Maximum Watt	80 W
PF	0.9
CRI	80
THD	15%
Flux	11200lm
Efficacy (AC)	140 lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	120-277 V
Working temperature	-4°F~113°F
Storage temperature	-22°F~140°F

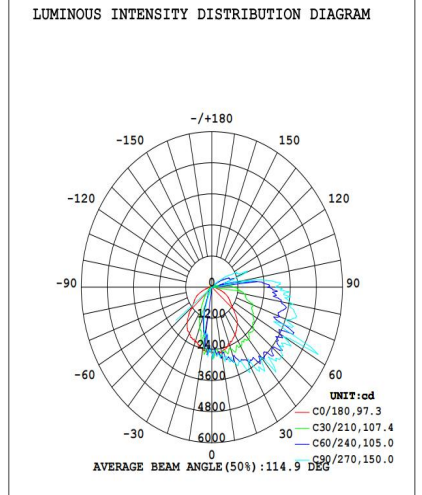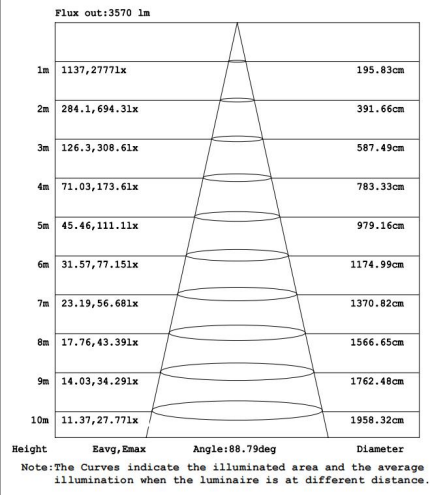

PFX3158-WP60/80/100W-3545K-A	
Minimum Watt	60 W
Maximum Watt	100 W
PF	0.9
CRI	80
THD	15%
Flux	13800 lm
Efficacy (AC)	138 lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	120-277 V
Working temperature	-4°F~113°F
Storage temperature	-22°F~140°F

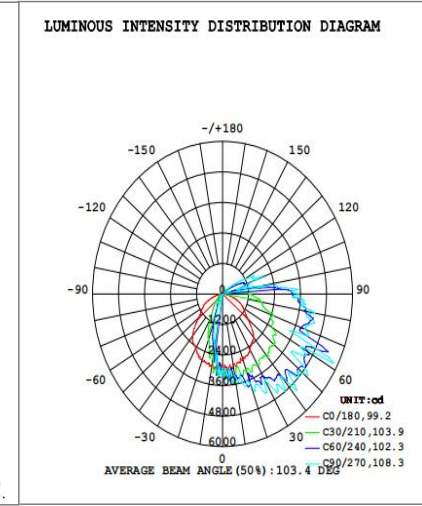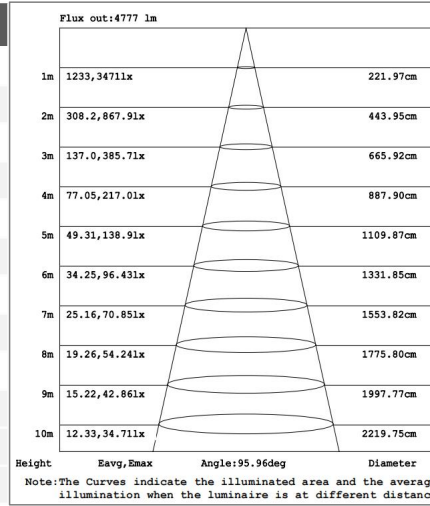

PFX3158-WP80/100/120W-3545K-A	
Minimum Watt	80 W
Maximum Watt	120 W
PF	0.9
CRI	80
THD	15%
Flux	16560lm
Efficacy (AC)	138 lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	120-277 V
Working temperature	-4°F~113°F
Storage temperature	-22°F~140°F

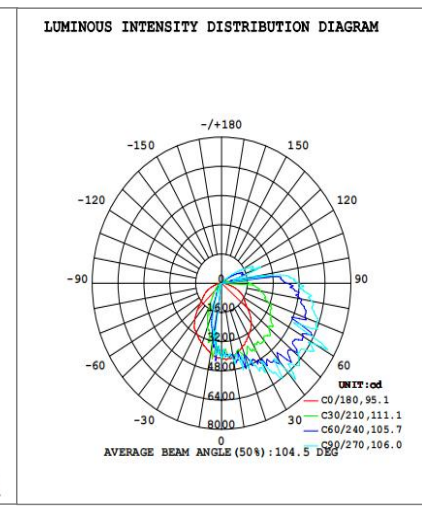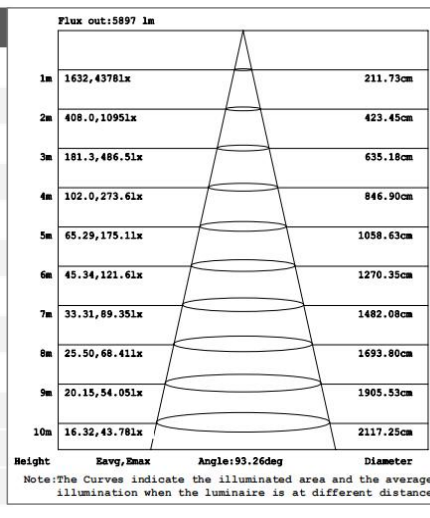

Disclaimer: Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.