

# PFX-5550

Remote Capable MR-16 Emergency Unit

STANDARD

OPTIONAL



## ILLUMINATION

- Two fully adjustable semi-recessed, round MR16 lamp heads for optimal light distribution
- Ultra-bright, energy efficient, long-life White LED lamps provide up to 76-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Offers 36W of remote capacity.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 40°C).


## MOUNTING

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
- Conduit mount knockout on top of housing and backplate.
- Suitable for wall mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

## DIMENSIONS

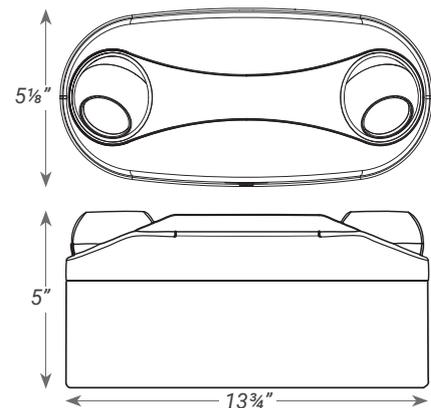

**Disclaimer:**

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# PFX-5550

Remote Capable MR-16 Emergency Unit

STANDARD

OPTIONAL



## ORDERING GUIDE

Example: PFX5550-RMR-16-65

| MODEL  | HOUSING COLOR |                | OPTIONS |                                 |
|--|---------------|----------------|---------|---------------------------------|
| PFX5550-RMR-16-65 (6 Volt)<br>PFX5550-RMR-16-125 (12 Volt) | (blank)<br>B  | White<br>Black | PLED    | 7.0W High Lumen White LED Lamps |

## ELECTRICAL INFORMATION

| CATALOG NUMBER           | INPUT WATTS (W) |      | INPUT AMPS (A) |      |
|--------------------------|-----------------|------|----------------|------|
|                          | 120V            | 277V | 120V           | 277V |
| PFX 5550-RMR-16-65-PLED  | 11.4            | 11.4 | 0.12           | 0.05 |
| PFX 5550-RMR-16-125-PLED | 11.5            | 11.7 | 0.12           | 0.05 |

## REMOTE LAMP COMPATIBILITY

| MODEL NUMBER             | BATTERY | REMOTE CAPACITY | COMPATIBLE REMOTE HEAD FAMILY |      |    |         |      |     |    |     |     |     |     |     |        |
|--------------------------|---------|-----------------|-------------------------------|------|----|---------|------|-----|----|-----|-----|-----|-----|-----|--------|
|                          |         |                 | RHLED                         |      |    | RH16LED | RH16 |     | RH |     | RHR |     | SRH |     | SRHLED |
|                          |         |                 | 3.6V                          | 9.6V | MV |         | 6V   | 12V | 6V | 12V | 6V  | 12V | 6V  | 12V |        |
| PFX 5550-RMR-16-65-PLED  | 6V      | 36W             |                               |      | X  | X       | X    |     | X  |     | X   |     | X   |     | X      |
| PFX 5550-RMR-16-125-PLED | 12V     | 36W             |                               |      | X  | X       |      | X   |    | X   |     | X   |     | X   |        |

**Disclaimer:**

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.