

PFX-3630

LED Pendant Chandelier Light Swirl Shape

















Model	PFX-3630-30W-3CCT-CR
Wattage	30W
Dimming	Traic Dimming
Lumen Output	2600 LM
Input Voltage	120Vac 60Hz
ССТ	3000K-4000K-5000K Selectable
CRI	Ra>80
Working Temperature	~32°F ~+113°F / ~0°C ~+45°C
Environment Location	DAMP LOCATIONS
Finish	Chrome
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours
Pendant Cable Length	Max at 5FT
PCS/BOX	1
Master Box Dimension	515x515x225MM / 20.27"x20.27"x8.85"
Master Box Weight	4.78LB

Application: Perfect dining room, kitchen island, stairwell and

more residenatial or commercial pendant lighting

Features

- Frosted extruded diffuser creates even illumination
- •CCT Selectable to meet different environmental needs
- •10%-100% Traic Dimmable
- Aluminum body with flexible composite diffuser
- •5 year limitedwarranty
- Damp Location Listed

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.





PFX-3630

LED Pendant Chandelier Light Swirl Shape










Dimension

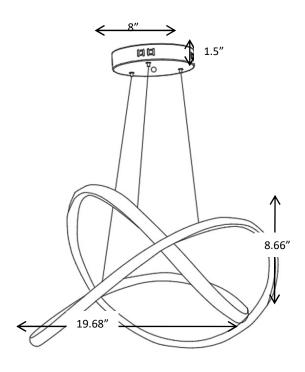

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.









