

# Model Number


## PFX-3608



Project:	
Type:	
Catalog #:	



### DIMENSIONS

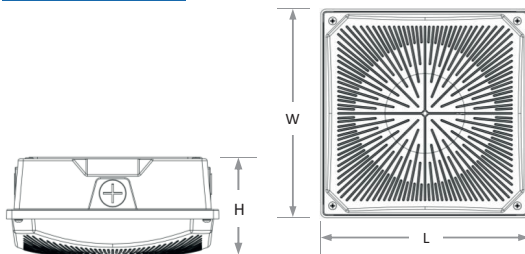

Model	Length	Width	Height	Weight
PFX-3608 -5L	8"	8"	3.7"	4 lbs.
PFX-3608 -10L	10"	10"	4.2"	6 lbs.

### WARRANTY & LISTINGS

- cULus listed for wet locations in ambient temperatures from -20°C to 45°C (-4°F to 113°F).
- IP65 rated for ingress protection.
- Lens is IK10 rated for impact.
- DLC premium approved (primary use categories: Parking Garage Canopy Luminaires).
- Complies with FCC Part 15, class A.
- Standard models comply with IEC/EN 61000-4-5, surge immunity protection, 2kV. Optional 10kV surge protector available (see below for ordering information).
- 5-year warranty on all electronics and housing.

### FEATURES

- Field selectable 3000k (warm white), 4000k (neutral white), & 5000k (cool white) color temperatures.\*
- Long-life LEDs provide 169,000 hours of operation with at least 70% of initial lumen output (L<sub>70</sub>), and 51,000 hours with at least 90% of initial lumen output (L<sub>90</sub>).\*\*
- LED chromaticity based on ≤ 7-step ANSI quadrangles.
- LED color maintenance ≤ 0.001 chromaticity shift (Δu'v') over the initial 6,000 hours of operation.
- 3608 -5L = 5,000 nominal lumens.
- 3608 -10L = 10,000 nominal lumens.
- Universal 120-277V (50/60Hz) AC voltage.
- 0-10vdc dimming drivers, which provide continuous dimming to 10% of maximum lumen output, are standard.
- Mounting options include surface-mounting and pendant-mounting using ¾" electrical conduit.
- Optional, integral occupancy/daylight sensor is installed inside the luminaire housing and provides both on/off and dimming functions.
- Power factor ≥ 0.90.
- Total harmonic distortion ≤ 20%.
- Color rendering index (R<sub>a</sub>) > 80. Red color rendering > -5.
- Die cast aluminum housing with white powder coat finish.
- Polycarbonate lens.
- Easy installation in new construction or retrofit.

\* Contact factory for other color temperatures and lumen packages.  
 \*\* L<sub>70</sub> hours are IES TM-21-11 calculated hours.

### ORDERING INFORMATION

Example: 3608-10L-KFS-ODS

Series	Nominal Lumen Output		Color Temperature		Occupancy Sensor		Surge Protection (optional)		Accessories	
3608	5L	5,000 lumens	KFS*	3000k	ODS	Microwave dimming, daylight & occupancy sensor (factory installed)	SP10	TDC model SPD277-10K.1 10kV surge protector	HD03R	Sensor remote control
	10L	10,000 lumens		4000k			Blank			
				5000k	Blank	No occupancy sensor				

\*Kelvin field selectable

<sup>1</sup> Remote control Required for programming (sold separately).

<sup>2</sup> Default sensor settings: detection area = 100%, hold time = 5 seconds, daylight threshold = disabled, stand-by period = 0 seconds, stand-by dimming level = 10%

## ELECTRICAL DATA

Model	Color Temperature	CRI <sup>1</sup>	Luminaire Lumens	Luminaire Watts	Lumens/Watt	Input Voltage <sup>2</sup>	Input Current (A)			Power Factor	THD <sup>3</sup>	L <sub>70</sub> Hours <sup>4</sup>
							120V	240V	277V			
3608-5L-KFS	3000k	> 80	5,010	40	126	120-277	0.33	0.17	0.14	> 0.90	< 20	169,000
3608-5L-KFS	4000k	> 80	5,399	38	141	120-277	0.32	0.16	0.14	> 0.90	< 20	169,000
3608-5L-KFS	5000k	> 80	5,462	40	137	120-277	0.33	0.17	0.14	> 0.90	< 20	169,000
3608-10L-KFS	3000k	> 80	9,329	75	125	120-277	0.63	0.31	0.27	> 0.90	< 20	169,000
3608-10L-KFS	4000k	> 80	10,156	71	142	120-277	0.59	0.30	0.26	> 0.90	< 20	169,000
3608-10L-KFS	5000k	> 80	10,016	75	134	120-277	0.63	0.31	0.27	> 0.90	< 20	169,000

<sup>1</sup> Color rendering index.

<sup>2</sup> All 50-60Hz.

<sup>3</sup> Total harmonic distortion.

<sup>4</sup> L<sub>70</sub> refers to the number of hours at which lumen output declines to 70% of the initial level. L<sub>70</sub> hours are IES TM-21-11 calculated hours.

## PHOTOMETRIC DATA


### 3608-5L-KFS

#### Luminaire Data

Description	Parking Garage Luminaire 5L, Kelvin Field Selectable (3K)
Total Lumens	5,010
Input Wattage	40
Efficacy (lm/W)	126
Max. Cd.	1100.47 (225H, 49V)
IES Classification	Type VS
Longitudinal Classification	Very Short

#### Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	377	7.5%
FM 30-60	1,117	22.3%
FH 60-80	765	15.3%
FVH 80-90	147	2.9%
BL 0-30	388	7.7%
BM 30-60	1,171	23.4%
BH 60-80	735	14.7%
BVH 80-90	123	2.5%
UL 90-100	72	1.4%
UH 100-180	116	2.3%
<b>Total</b>	<b>5,010</b>	<b>100.0%</b>
BUG Rating	B2-U3-G2	

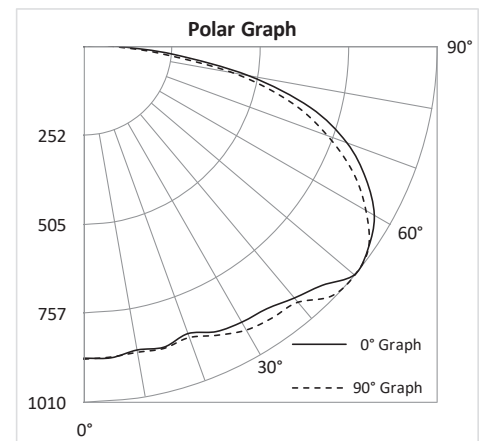

### 3608-10L-KFS

#### Luminaire Data

Description	Parking Garage Luminaire 10L, Kelvin Field Selectable (3K)
Total Lumens	9,329
Input Wattage	75
Efficacy (lm/W)	125
Max. Cd.	1987.47 (270H, 46V)
IES Classification	Type VS
Longitudinal Classification	Short

#### Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	774	8.3%
FM 30-60	2,084	22.3%
FH 60-80	1,355	14.5%
FVH 80-90	283	3.0%
BL 0-30	773	8.3%
BM 30-60	2,093	22.4%
BH 60-80	1,351	14.5%
BVH 80-90	280	3.0%
UL 90-100	135	1.4%
UH 100-180	201	2.2%
<b>Total</b>	<b>9,329</b>	<b>100.0%</b>
BUG Rating	B3-U3-G3	

