

# PFX-5546

Adjustable Optics LED Emergency Unit

STANDARD



## ILLUMINATION

- Long life, efficient, ultra bright white LED lamp heads.
- 1W (8 LEDs x 0.125W) per head.
- High performance, chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Two adjustable LED lamp heads provide optimal center-to-center spacing.

## ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90 - minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
- Top and side knockout for conduit applications.
- Suitable for wall or ceiling mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

## OPTIONS


- SPV: UL Listed for special voltage option.



## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

## DIMENSIONS

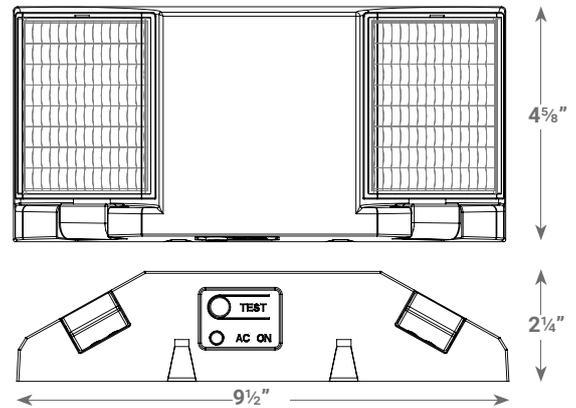

## ORDERING GUIDE

Example: PFX-5546LEDR-2

MODEL	HOUSING COLOR		OPTIONS	
PFX-5546 LEDR-2	(blank)	White	SPV	208/220/240 Volt, 50/60Hz
	B	Black		

**Disclaimer:**

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# PFX-5546

Adjustable Optics LED Emergency Unit

STANDARD



## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
PFX5546LEDR-2	2.1	2.1	0.025	0.01

## CENTER-TO-CENTER SPACING GUIDELINES

For reference only.



1	0.03	0.04	0.06	0.06	0.08	0.12	0.18	0.24	0.24	0.30	0.36	0.33	0.34	0.37	0.43	0.45	0.49	0.52	0.36	0.36	0.18	0.10	0.07	0.04	
2	0.03	0.04	0.06	0.07	0.11	0.20	0.40	0.03	0.60	0.55	0.48	0.46	0.45	0.58	0.80	1.35	1.39	1.04	0.57	0.47	0.32	0.13	0.09	0.06	
3	0.03	0.04	0.06	0.10	0.11	0.33	0.79	1.11	1.34	1.36	0.92	0.60	0.47	0.92	1.72	1.87	1.61	1.05	0.61	0.52	0.33	0.24	0.10	0.05	
4	0.03	0.04	0.06	0.10	0.18	0.37	0.69	1.07	1.53	1.71	1.52	1.02	0.53	1.20	1.65	1.65	1.33	0.87	0.57	0.50	0.34	0.20	0.09	0.05	
5	0.03	0.04	0.06	0.09	0.16	0.31	0.58	0.91	1.22	1.44	1.41	1.00	0.45	0.72	1.05	1.00	0.78	0.55	0.34	0.24	0.20	0.12	0.07	0.05	
6	0.03	0.04	0.06	0.07	0.10	0.19	0.33	0.53	0.84	0.94	0.92	0.61	0.33	0.39	0.53	0.53	0.44	0.28	0.27	0.20	0.15	0.10	0.06	0.03	
	12	11	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	11	12

Meets NFPA 101 Requirements for: 14' center-to-center spacing - 3' path of egress 2' from the wall- 7 1/2' mounting height.

**Disclaimer:**

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.