

PFX-3108

CUT-OFF LED WALL PACK



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC150-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC150-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE VS DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option


PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT | LUMENS | EFFICACY |
|-----------------|----------------|-------|-----------|----------|
| 12W | 12.65 | 3000K | 1,530.00 | 120.95 |
| 12W | 12.65 | 4000K | 1,606.50 | 127.00 |
| 12W | 12.65 | 5000K | 1,686.83 | 133.35 |
| 24W | 23.68 | 3000K | 3,060.00 | 129.22 |
| 24W | 23.68 | 4000K | 3,213.00 | 135.68 |
| 24W | 23.68 | 5000K | 3,373.65 | 142.47 |
| 36W | 34.27 | 3000K | 4,590.00 | 133.94 |
| 36W | 34.27 | 4000K | 4,819.50 | 140.63 |
| 36W | 34.27 | 5000K | 5,060.48 | 147.66 |
| 48W | 46.60 | 3000K | 6,120.00 | 131.33 |
| 48W | 46.60 | 4000K | 6,426.00 | 137.90 |
| 48W | 46.60 | 5000K | 6,747.30 | 144.79 |
| 60W | 56.83 | 3000K | 7,650.00 | 134.61 |
| 60W | 56.83 | 4000K | 8,032.50 | 141.34 |
| 60W | 56.83 | 5000K | 8,434.13 | 148.41 |
| 72W | 67.65 | 3000K | 9,180.00 | 135.70 |
| 72W | 67.65 | 4000K | 9,639.00 | 142.48 |
| 72W | 67.65 | 5000K | 10,121.00 | 149.61 |

PRODUCT DIMENSIONS

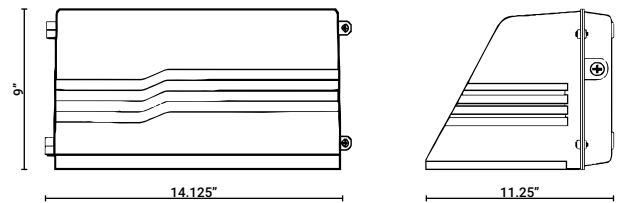

POWER

POWER FACTOR >0.90 - THD <20

ORDERING GUIDE

Sample Part # PFX-3108 - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT) | HOUSING COLOR | OPTIONS & ACCESSORIES |
|----------|--------------|---------------------------|----------------------|--|
| PFX-3108 | | | | |
| | 12W 12 WATTS | 27K 2700K - WARM WHITE | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL |
| | 24W 24 WATTS | 30K 3000K - WARM WHITE | WH WHITE | PC2 208/277V PHOTOCELL |
| | 36W 36 WATTS | 35K 3500K - NEUTRAL WHITE | BL BLACK | MS MOTION SENSOR |
| | 48W 48 WATTS | 40K 4000K - NEUTRAL WHITE | SL SILVER | MS-D2 MOTION SENSOR WITH BILEVEL DIMMING |
| | 60W 60 WATTS | 50K 5000K - COOL WHITE | CC CUSTOM COLOR | D1 0-10V DIMMING |
| | 72W 72 WATTS | 57K 5700K - DAYLIGHT | | D2 STEP DIMMING (120V ONLY) |
| | | | | EM EMERGENCY BATTERY PACK |
| | | | | V1* 480/347V INPUT (120-277V STANDARD) |

*NOT AVAILABLE WITH EM, PHOTOCELL OR MOTION SENSOR

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.