

PFX-3625

LED Single Ring Flush Mount Ceiling Light




DESCRIPTION

PFX-3625 LED Flush mount ceiling light, the modern Surface Mount lighting solution for easy ceiling installation Perfect for ceiling or wall mount applications. These flush mount ceiling lights mount directly to a junction box ideal for Residential and commercial applications



INSTALLATION

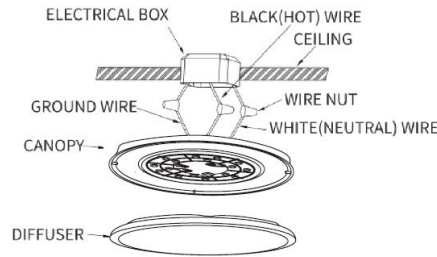

SPECIFICATIONS

Model	PFX-3625-FM-R13-16W-5CCT	PFX-3625-FM-R15-22W-5CCT	PFX-3625-FM-R20-26W-5CCT
Wattage	16W	22W	26W
Size	13"	15"	20"
Lumen Output	1280 lm	1760 lm	2080 lm
Input Voltage	AC120V		
CCT	2700K-3000K-3500K-4000K-5000K Selectable		
Beam Angle	120		
CRI	Ra>80		
Working Temperature	~4°F ~+113°F / ~20°C ~+40°C		
Lens	White Acrylic		
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours		
Finish	NK: Brushed Nickel / BK: Matt Black / GD: Brushed Gold		
PCS/BOX	6	6	6
Master Box Dimension	525X365X365mm 20.67"X14.37"X14.37"	525X415X415mm 20.67"X16.34"X16.34"	585X510X510mm 23.03"x20.08"x20.08"
Master Box Weight	5.62kg/12.39lbs	7kg/15.43lbs	10.8kg/23.81lbs

ORDERING GUIDE

Example: PFX-3625-FM-13-16W-5CCT

Model	Product	Size-Wattage	CCT	Finish
PFX-3625	FM: Flush Mount Ceiling Light	13" - 16W	5 CCT Selectable: 2700K/3000K/3500K/4000K/5000K	NK Brushed Nickel
		15" - 22W		BK Matt Black
		20" - 26W		GD Brushed Gold

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3625


LED Single Ring Flush Mount Ceiling Light



DIMENSION (INCHES)

Front View


Side View




Model No.	PFX3625-FM13-16WCCT-XX	PFX3625-FM15-22WCCT-XX	PFX3625-FM20-26WCCT-XX
Size			
L1	Φ330mm/12.99"	Φ390mm/15.35"	Φ490mm/19.29"
L2	65mm/2.56"	65mm/2.56"	65mm/2.56"

Operating Guide


1 CCT Adjustable

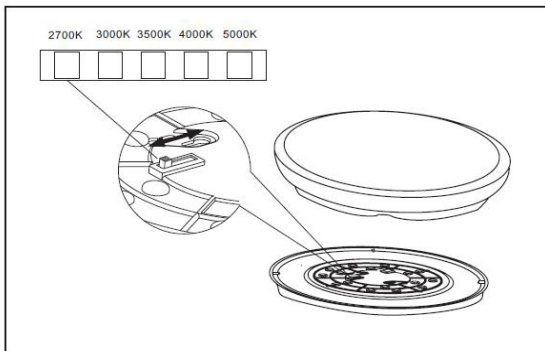

2 Wiring Guide

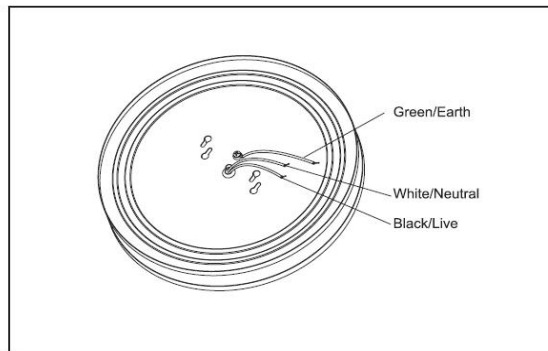

Photometrics

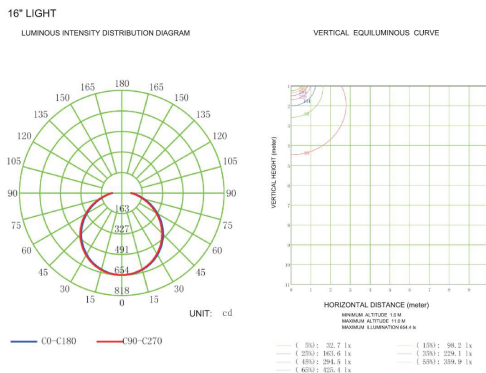

Application



Application: Perfect for ceiling or wall mount applications. These flush mount ceiling lights mount directly to a junction box ideal for Residential and commercial applications

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.