

PFX-5304


WRAP LIGHT



FEATURES

Field selectable 3500k (warm/neutral white), 4000k (neutral-white), and 5000k (cool white) color temperatures.*
 LED color maintenance < 0.002 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
 LED chromaticity based on < 4-step ANSI quadrangles.
 WR-5L-LKFS provides a range of 4,100 to 5,800 nominal lumens and 132 to 154 lumens per watt (LPW).*Universal 120-277 AC voltage (50-60Hz) is standard.
 0-10vdc dimming drivers are standard. Power factor > 0.90.
 Total harmonic distortion < 20%. Color rendering index > 80.
 Steel housing and PMMA lens.
 Optional emergency drivers and occupancy sensors are available.
 Easy installation in new construction or retrofit.

DIMENSION (INCHES)

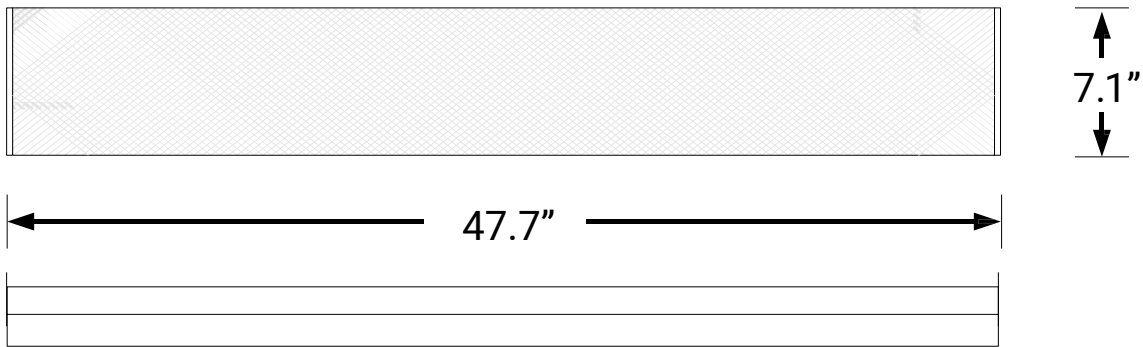

ORDERING GUIDE

Sample Part PFX5304-WR-5L-LKFS-ODS-EM10

Series	Nominal Lumen Output		Select	Occupancy Sensor ²		Internally Installed Emergency Drivers ³	
	5L	5,000 nominal lumens		OS	Passive infrared	EM10	1,320 lumens
PFX5304 WR			LKFS	ODS	Microwave	EM13	1,720 lumens
				Blank	No occupancy sensor	Blank	No emergency driver

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5304

WRAP LIGHT



COMPATIBLE EMERGENCY DRIVERS*

Emergency Driver Part Number	EM10		EM13	
	Watts	EM Lumens	Watts	EM Lumens
PFX5304WR-5L-LKFS	10	1320	13	1720

* Suitable for ambient temperatures above 10°C (50°F).

COMPATIBLE EMERGENCY DRIVERS INTERNALLY INSTALLED

Model	Emergency Options
PFX5304 WR-5L-LKFS	EM10 EM13

¹ Suitable for ambient temperatures above 10°C (50°F).

² For list of remote mountable emergency drivers, see *ACCESSORIES*.

ACCESSORIES (Order Separately)

Remote Mount Emergency Drivers*

BLEM-CP-5C

BLEM-CP-10C

BLEM-CP-13C

* Suitable for ambient temperatures above 10°C (50°F).

COMPATIBLE DIMMERS

Manufacturer	Model Number	Dimming Range	Load Switching Capacity
Leviton	IP710-LFZ	10%-100%	1200W
Lutron	DVSTV	10%-100%	450W

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5304

WRAP LIGHT



ELECTRICAL DATA

Series	Measurements	Low Lumens			Mid Lumens			High Lumens		
		3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
PFX5304 WR-5L-LKFS	Lumens	4155	4336	4233	4750	4932	4817	5423	5837	5503
	Watts	30	28	30	35	32	35	41	39	41
	Efficacy	138	154	141	135	152	137	132	149	134
	Input Current (A)	120V = 0.25A	120V = 0.23A	120V = 0.25A	120V = 0.29A	120V = 0.27A	120V = 0.29A	120V = 0.34A	120V = 0.33A	120V = 0.34A
240V = 0.13A		240V = 0.12A	240V = 0.13A	240V = 0.15A	240V = 0.13A	240V = 0.15A	240V = 0.17A	240V = 0.16A	240V = 0.17A	
277V = 0.11A		277V = 0.10A	277V = 0.11A	277V = 0.13A	277V = 0.12A	277V = 0.13A	277V = 0.15A	277V = 0.14A	277V = 0.15A	

PHOTOMETRIC DATA


PFX5304WR-5L-LKFS

Luminaire Data

Description	4' WRAP LIGHT 5L 5K - LKFS
Total Lumens	5,504
Input Wattage	41
Efficacy (lm/W)	134
Spacing Criterion (0-180°)	1.28
Spacing Criterion (90-270°)	1.22

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	665	12.1%
0-30°	1,403	25.5%
0-40°	2,280	41.4%
20-50°	2,514	45.7%
40-70°	2,339	42.5%
0-60°	3,986	72.4%
0-80°	5,034	91.5%
0-90°	5,228	95.0%
90-180°	276	5.0%
0-180°	5,504	100.0%

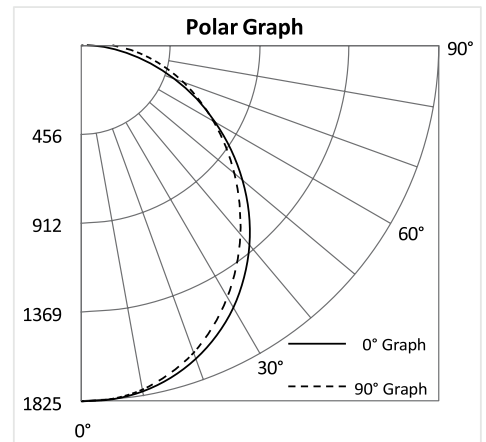

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.