

PFX-3208

LED AREA LIGHT



DESCRIPTION

The PFX-3208 is the next-generation LED Area Light from Paraflex, delivering exceptional performance and value with full configurability. Offering 11,000 to 48,000 lumens, it is a cost-effective replacement for 250W to 1000W HID fixtures.

The PFX-3208 family is available in three housing sizes with multiple mounting options, including slipfitter, square or round pole arms, and yoke mounts. For added versatility, the series supports photocells, motion sensors, and external light control shields.

PRODUCT SPECIFICATION

Construction

Built to last, the PFX-3208 combines durability with performance. Its heavy-duty die-cast aluminum housing and advanced vented design keep LEDs running cooler, brighter, and longer. A sealed body shields against weather and contaminants, while the compact, vibration-rated design reduces wind load — maximizing pole efficiency and reliability in any environment.

Electrical

The PFX-3208 is designed for reliable performance and ease of installation. It supports universal input voltage (AC120–277V / AC120–347V) with a standard 10kV surge protector, or high-voltage operation at AC277–480V with a standard 20kV surge protector. A 0–10V dimmable driver is integrated into the fixture, with dimming leads kept internal for a clean design. The system maintains a power factor of ≥ 0.95 with total harmonic distortion of $\leq 20\%$, ensuring efficient and consistent operation. For convenience, the fixture comes pre-wired with two 24-inch power cords to simplify installation.

Optics

- Light engines are available in (30/40/50)K selectable (CRI70) configuration
- Type III, IV, V distribution optional

Finish

- Dark bronze is standard and black, white, grey and other customized colors are available.



Ambient Temperature

- 40° F (-40° C) to 113° F (45° C)

Listing

- UL Certified to meet U.S. and Canadian standards. Suitable for wet locations. Rated for -40°C minimum ambient. Design Lights Consortium® (DLC) Premium qualified product and DLC qualified product.

Warranty

- 5-years limited warranty.

ORDERING GUIDE

Example: PFX-3208(240/260/280/310)WHV(30/40/50)KT3SFDPS

Product name	Wattage ¹ XXXW	Input Voltage ² AA	CCT ³ XXK	Dist.Type Y	Mount Y	Finish Y	Photocontrol Y	Sensor Y
PFX-3208	(80/100/120/150)W (170/200/220/240)W (240/260/280/310)W	Blank=120-277V HL=120-347V HV=277- 480V	30K=3000K 40K=4000K 50K=5000K (30/40/50)K= 3000/4000/5000K	T3=Type III T4=Type IV T5=Type V	SF=Slipfitter Mount PA=Square and Round Pole Mount Arm TR=Trunnion Mount AA=Adjustable Square and Round Pole Mount Arm UB=Universal bracket	D=Dark Bronze B=Black W=White SG=Silver Grey	Blank=without Photocell P=with Photocell	S=with Motion Sensor Blank= without Motion Sensor

Note: 1.(80/100/120/150)W=150W, 120W, 100W, 80W Selectable, 150W default setting. (170/200/220/240)W=240W, 220W, 200W, 170W Selectable, 240W default setting.
2.(240/260/280/310)W=310W, 280W, 260W, 240W Selectable, 310W default setting.
2.The Input Voltage AC120-277V and AC277-480V is for US Market, AC120-347V is for Canada Market only.
3.(30/40/50)K=3000K, 4000K, 5000K Selectable, 5000K default setting.

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



PFX-3208

LED AREA LIGHT



SPECIFICATION

Wattage & CCT Selectable

Lumen values are based on 120V AC input product configuration, contact for performance data on any configurations not shown here.

Size	Watts	Distribution Type	5000K, CRI70					4000K, CRI70					3000K, CRI70				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
Size 1 (80/100/120/150)W Selectable	80W	T3	12,800	3	0	3	160	14,450	3	0	3	181	12,300	3	0	3	154
	100W		15,850	3	0	3	159	17,850	3	0	3	179	15,250	3	0	3	153
	120W		18,600	3	0	3	155	20,950	3	0	3	175	17,850	3	0	3	149
	150W		22,650	3	0	3	151	25,500	3	0	3	170	21,800	3	0	3	145
	80W	T4	12,800	3	0	3	160	14,450	3	0	3	181	12,300	3	0	3	154
	100W		15,850	3	0	3	159	17,850	3	0	3	179	15,250	3	0	3	153
	120W		18,600	3	0	3	155	20,950	3	0	3	175	17,850	3	0	3	149
	150W		22,650	3	0	3	151	25,500	3	0	3	170	21,800	3	0	3	145
	80W	T5	12,800	4	0	2	160	14,450	4	0	2	181	12,300	4	0	2	154
	100W		15,850	4	0	2	159	17,850	4	0	2	179	15,250	4	0	2	153
	120W		18,600	4	0	2	155	20,950	4	0	2	175	17,850	4	0	2	149
	150W		22,650	4	0	2	151	25,500	4	0	2	170	21,800	4	0	2	145
Size 2 (170/200/220/240)W Selectable	170W	T3	26,900	4	0	4	159	28,550	4	0	4	168	26,150	4	0	4	154
	200W		31,050	4	0	4	156	32,950	4	0	4	165	30,200	4	0	4	151
	220W		33,500	4	0	4	153	35,550	4	0	4	162	32,550	4	0	4	148
	240W		35,850	4	0	4	150	38,000	4	0	4	159	34,800	4	0	4	145
	170W	T4	26,900	4	0	4	159	28,550	4	0	4	168	26,150	4	0	4	154
	200W		31,050	4	0	4	156	32,950	4	0	4	165	30,200	4	0	4	151
	220W		33,500	4	0	4	153	35,550	4	0	4	162	32,550	4	0	4	148
	240W		35,850	4	0	4	150	38,000	4	0	4	159	34,800	4	0	4	145
	170W	T5	26,900	5	0	2	159	28,550	5	0	2	168	26,150	5	0	2	154
	200W		31,050	5	0	2	156	32,950	5	0	2	165	30,200	5	0	2	151
	220W		33,500	5	0	2	153	35,550	5	0	2	162	32,550	5	0	2	148
	240W		35,850	5	0	2	150	38,000	5	0	2	159	34,800	5	0	2	145
Size 3 (240/260/280/310)W Selectable	240W	T3	37,950	4	0	4	159	42,750	4	0	4	179	36,900	4	0	4	154
	260W		39,950	4	0	4	154	45,000	4	0	4	173	38,850	4	0	4	150
	280W		42,600	4	0	4	153	48,000	4	0	4	172	41,450	4	0	4	148
	310W		46,250	4	0	4	150	52,100	4	0	4	168	45,000	4	0	4	145
	240W	T4	37,950	5	0	4	159	42,750	5	0	4	179	36,900	5	0	4	154
	260W		39,950	5	0	4	154	45,000	5	0	4	173	38,850	5	0	4	150
	280W		42,600	5	0	4	153	48,000	5	0	4	172	41,450	5	0	4	148
	310W		46,250	5	0	4	150	52,100	5	0	4	168	45,000	5	0	4	145
	240W	T5	37,950	5	0	3	159	42,750	5	0	3	179	36,900	5	0	3	154
	260W		39,950	5	0	3	154	45,000	5	0	3	173	38,850	5	0	3	150
	280W		42,600	5	0	3	153	48,000	5	0	3	172	41,450	5	0	3	148
	310W		46,250	5	0	3	150	52,100	5	0	3	168	45,000	5	0	3	145

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3208

LED AREA LIGHT



SPECIFICATION

Wattage Selectable & Single CCT

Lumen values are based on 120V AC input product configuration, contact for performance data on any configurations not shown here.

Size	Watts	Distribution Type	5000K, CRI70					4000K, CRI70					3000K, CRI70				
			Lumens	B	U	U	LPW	Lumens	B	U	U	LPW	Lumens	B	U	U	LPW
Size 1 (80/100/120/150)W Selectable	80W	T3	12750	3	0	3	159	12600	3	0	3	157	12300	3	0	3	154
	100W		15800	3	0	3	158	15550	3	0	3	156	15250	3	0	3	153
	120W		18500	3	0	3	154	18250	3	0	3	152	17850	3	0	3	149
	150W		22500	3	0	3	150	22200	3	0	3	148	21750	3	0	3	145
	80W	T4	12750	3	0	3	159	12600	3	0	3	157	12300	3	0	3	154
	100W		15800	3	0	3	158	15540	3	0	3	156	15250	3	0	3	153
	120W		18500	3	0	3	154	18250	3	0	3	152	17850	3	0	3	149
	150W		22500	3	0	3	150	22200	3	0	3	148	21750	3	0	3	145
	80W	T5	12750	4	0	2	159	12600	4	0	1	157	12300	4	0	2	154
	100W		15800	4	0	2	158	15540	4	0	1	156	15250	4	0	2	153
	120W		18500	4	0	2	154	18250	4	0	1	152	17850	4	0	2	149
	150W		22500	4	0	2	150	22200	4	0	1	148	21750	4	0	2	145
Size 2 (170/200/220/240)W Selectable	170W	T3	27050	4	0	4	159	26700	4	0	4	157	26150	4	0	4	154
	200W		31200	4	0	4	156	30800	4	0	4	154	30200	4	0	4	151
	220W		33700	4	0	4	153	33250	4	0	4	151	32550	4	0	4	148
	240W		36000	4	0	4	150	35520	4	0	4	148	34800	4	0	4	145
	170W	T4	27050	4	0	4	159	26700	4	0	4	157	26150	4	0	4	154
	200W		31200	4	0	4	156	30800	4	0	4	154	30200	4	0	4	151
	220W		33700	4	0	4	153	33250	4	0	4	151	32550	4	0	4	148
	240W		36000	4	0	4	150	35520	4	0	4	148	34800	4	0	4	145
	170W	T5	27050	5	0	2	159	26700	5	0	2	157	26150	5	0	2	154
	200W		31200	5	0	2	156	30800	5	0	2	154	30200	5	0	2	151
	220W		33700	5	0	2	153	33250	5	0	2	151	32550	5	0	2	148
	240W		36000	5	0	2	150	35520	5	0	2	148	34800	5	0	2	145
Size 3 (240/260/280/310)W Selectable	240W	T3	38200	4	0	4	159	37700	4	0	4	157	36900	4	0	4	154
	260W		40200	4	0	4	155	39650	4	0	4	153	38850	4	0	4	150
	280W		42850	4	0	4	153	42300	4	0	4	151	41450	4	0	4	148
	310W		46500	4	0	4	150	45880	4	0	4	148	44950	4	0	4	145
	240W	T4	38200	4	0	4	159	37700	4	0	4	157	36900	4	0	4	154
	260W		40200	4	0	4	155	39650	4	0	4	153	38850	4	0	4	150
	280W		42850	4	0	4	153	42300	4	0	4	151	41450	4	0	4	148
	310W		46500	4	0	4	150	45880	4	0	4	148	44950	4	0	4	145
	240W	T5	38200	5	0	2	159	37700	5	0	2	157	36900	5	0	2	154
	260W		40200	5	0	2	155	39650	5	0	2	153	38850	5	0	2	150
	280W		42850	5	0	2	153	42300	5	0	2	151	41450	5	0	2	148
	310W		46500	5	0	2	150	45880	5	0	2	148	44950	5	0	2	145


Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3208

LED AREA LIGHT




PHOTOMETRIC DIAGRAMS

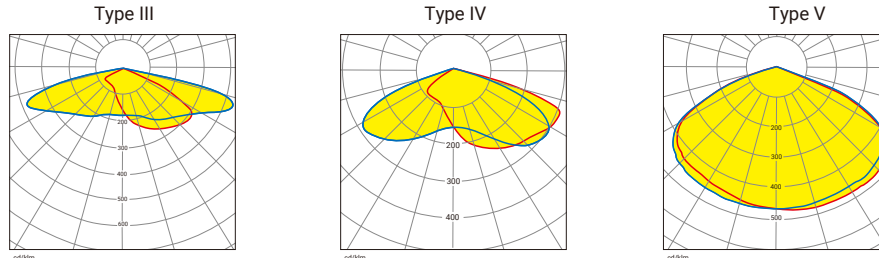

Is of footcandle plots for the 150W-5000K. Distances are in units of mounting height (30')

LEGEND

- 0.1 fc
- 0.5 fc
- 1.0 fc

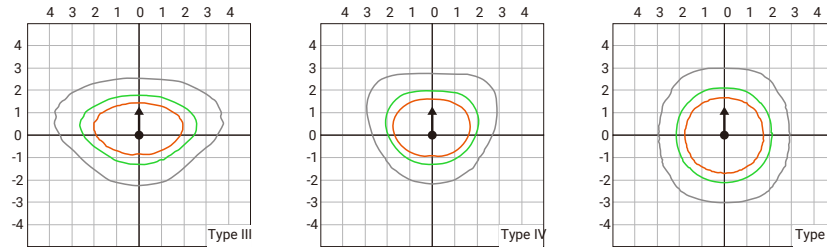

POWER SELECTION AND CCT SELECTION CAPABILITY



CCT Select Technology

Adjust CCT between 3000/4000/5000K, 5000K default setting.

Power Select Technology

Size	Power Selection	Default Setting
Size 1	Adjust power between 80/100/120/150W	150W
Size 2	Adjust power between 170/200/220/240W	240W
Size 3	Adjust power between 240/260/280/310W	310W

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3208 LED AREA LIGHT



EPA (Square and round pole arm)

*Includes luminaire and integral mounting arm, other tenons, arms, brackets or other accessories are not included in this EPA Data

Mounting Type	Tilt	EPA(.2)								
		Single	2@90	2@180	3@90	3@120	4@90	2 Side by Side	3 Side by Side	4 Side by Side
Size 1	0°	0.23	0.41	0.42	0.60	0.54	0.80	0.46	0.69	0.91
	10°	0.18	0.35	0.35	0.53	0.46	0.69	0.35	0.53	0.71
	20°	0.17	0.34	0.34	0.51	0.44	0.67	0.34	0.52	0.69
	30°	0.21	0.37	0.39	0.54	0.48	0.74	0.42	0.64	0.85
	40°	0.27	0.40	0.45	0.58	0.55	0.80	0.54	0.81	1.08
	45°	0.30	0.42	0.50	0.60	0.58	0.83	0.61	0.91	1.21
	50°	0.45	0.61	0.72	0.87	0.85	1.21	0.89	1.34	1.79
	60°	0.73	0.99	1.19	1.41	1.39	1.96	1.47	2.20	2.94
	70°	0.95	1.38	1.57	1.96	1.90	2.74	1.90	2.86	3.81
	80°	1.13	1.71	1.89	2.45	2.36	3.40	2.26	3.40	4.53
Size 2	90°	1.28	1.99	2.18	2.86	2.77	3.96	2.57	3.85	5.14
	0°	0.25	0.44	0.46	0.65	0.58	0.87	0.50	0.75	0.99
	10°	0.19	0.38	0.38	0.57	0.50	0.75	0.38	0.58	0.77
	20°	0.19	0.37	0.37	0.55	0.48	0.73	0.37	0.56	0.75
	30°	0.23	0.40	0.43	0.59	0.53	0.80	0.46	0.69	0.92
	40°	0.29	0.44	0.49	0.63	0.60	0.87	0.59	0.88	1.17
	45°	0.33	0.45	0.54	0.66	0.63	0.90	0.66	0.99	1.32
	50°	0.49	0.66	0.79	0.95	0.93	1.31	0.97	1.46	1.94
	60°	0.80	1.08	1.29	1.54	1.51	2.13	1.60	2.39	3.20
	70°	1.04	1.50	1.70	2.13	2.07	2.97	2.07	3.11	4.14
Size 3	80°	1.23	1.86	2.05	2.66	2.57	3.70	2.46	3.69	4.92
	90°	1.39	2.16	2.37	3.11	3.01	4.30	2.79	4.19	5.58
	0°	0.35	0.62	0.64	0.91	0.82	1.21	0.69	1.04	1.39
	10°	0.27	0.54	0.53	0.80	0.69	1.06	0.54	0.81	1.08
	20°	0.26	0.52	0.52	0.77	0.67	1.02	0.52	0.79	1.05
	30°	0.32	0.56	0.60	0.83	0.74	1.12	0.64	0.97	1.29
	40°	0.41	0.61	0.68	0.88	0.84	1.21	0.82	1.23	1.64
	45°	0.46	0.63	0.76	0.92	0.89	1.26	0.92	1.38	1.85
	50°	0.68	0.93	1.10	1.32	1.30	1.84	1.36	2.04	2.72
	60°	1.12	1.51	1.81	2.15	2.12	2.99	2.24	3.35	4.47
	70°	1.45	2.09	2.38	2.99	2.90	4.16	2.90	4.35	5.79
	80°	1.72	2.60	2.88	3.72	3.60	5.18	3.44	5.17	6.89
	90°	1.95	3.02	3.32	4.35	4.22	6.03	3.91	5.86	7.82

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3208

LED AREA LIGHT



ACCESSORIES

Control Options

Call to confirm availability

	PFX-SCKit01 Shorting Cap Kit (with receptacle)		PFX-PCKit-UNV27V Black Twist-lock Photocell Kit (with receptacle) for PFX-3208, at AC120-277V
	PFX-PCKit-UNV34V Twist-lock Photocell Kit (with receptacle) for PFX-3208, at AC120-347V		PFX-PCKit-HV48V Twist-lock Photocell Kit (with receptacle) for PFX-3208, at AC277-480V
	PFX-HD09VR-PH Screw-in PIR Sensor		



Adapter

Field-Installable (field-installable purchased separately)

	PFX-3PTZ10ZGA-WA Zhaga Adapter for 3-pin Reverse to Z10 Zhaga
---	---

Glare Control Shield

Field-Installable/ Field-Use ONLY (purchased separately)

	PFX-ALH150W-HGS-D-A External Half Glare shield for PFX150W		
	PFX-ALH240W-HGS-D-A External Half Glare shield for PFX240W		PFX-ALH310W-HGS-D-A External Half Glare shield for PFX310W
	PFX-ALH150W-FGS-D-A External 360° Full Visor for PFX150W		
	PFX-ALH240W-FGS-D-A External 360° Full Visor for PFX240W		PFX-ALH310W-FGS-D-A External 360° Full Visor for PFX310W



PFX-3208

LED AREA LIGHT



MOUNTING INFORMATION

Mounts and Brackets

May come with separate box with fixture.

	PFX-ALHSQMD02 Square & Round Pole Mount for XALH, Dark Bronze, Ver2 (Black, White, Grey and other customized color are available.)		PFX-ALHSPMD01 Slipfrier Mount for XALH, Dark Bronze (Black, White, Grey and other customized color are available.)
	PFX-ALHWMD01 Wallmount for PFX, Dark Bronze (Black, White, Grey and other customized color are available.)		PFX-ALHTRMD01 Trunnion Mount for PFX, Dark Bronze (Black, White, Grey and other customized color are available.)
	PFX-ALHUVMD01 Universal Bracket Mount for PFX, Dark Bronze (Black, White, Grey and other customized color are available.)		PFX-ALHAAMD02 Adjustable Square & Round Pole Mount for PFX, Dark Bronze, Ver2 (Black, White, Grey and other customized color are available.)

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3208

LED AREA LIGHT





ELECTRICAL DATA

Model Series	Wattage(W)	120	208	Current (A) Input Voltage (V)		347	480
				240	277		
PFX3208-ALH (80/100/120/150)W	80	0.74	0.43	0.37	0.32	0.26	0.19
	100	0.93	0.53	0.46	0.40	0.32	0.23
	120	1.11	0.64	0.56	0.48	0.38	0.28
	150	1.39	0.80	0.69	0.60	0.48	0.35
PFX3208-ALH (170/200/220/240)W	170	1.57	0.91	0.79	0.68	0.54	0.39
	200	1.85	1.07	0.93	0.80	0.64	0.46
	220	2.04	1.18	1.02	0.88	0.70	0.51
	240	2.22	1.28	1.11	0.96	0.77	0.56
PFX3208-ALH (240/260/280/310)W	240	2.22	1.28	1.11	0.96	0.77	0.56
	260	2.41	1.39	1.20	1.04	0.83	0.60
	280	2.59	1.50	1.30	1.12	0.90	0.65
	310	2.87	1.66	1.44	1.24	0.99	0.72

DIMENSIONS AND WEIGHT



80W / 100W / 120W / 150W

Without Mounting Bracket





Net Weight: 7.2Lbs/3.25kgs

170W / 200W / 220W / 240W





Net Weight: 9.1Lbs/4.14kgs

240W / 260W / 280W / 310W


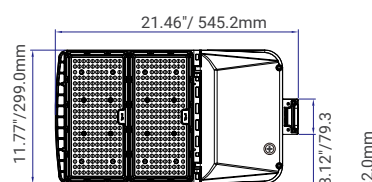


Net Weight: 13.3Lbs/5.12kgs



Square & Round Pole Mount



Net Weight: 9.2Lbs/4.19kgs

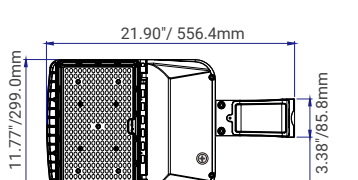

Net Weight:
11.2Lbs/5.08kgs

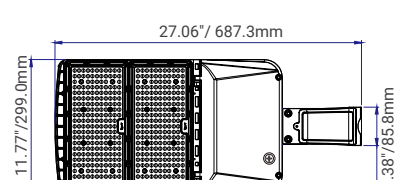

Net Weight: 13.3Lbs/6.06kgs

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.






PFX-3208

LED AREA LIGHT






DIMENSIONS AND WEIGHT




Slip Fitter Mount

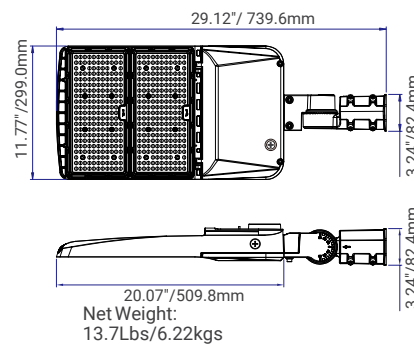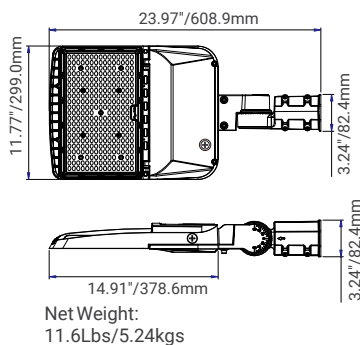

Wall Mount

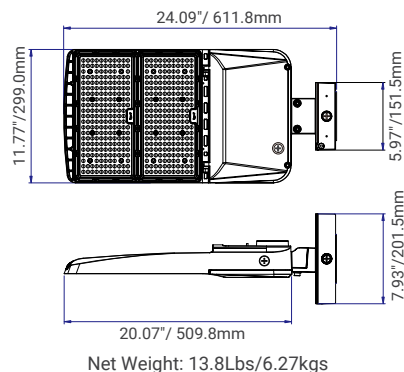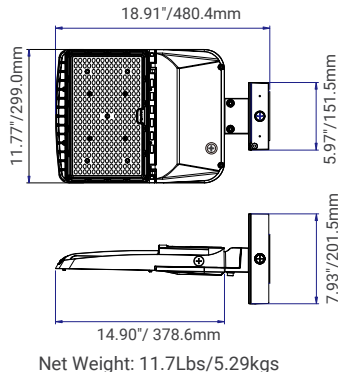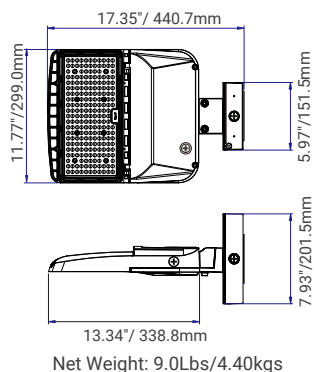

Trunnion Mount

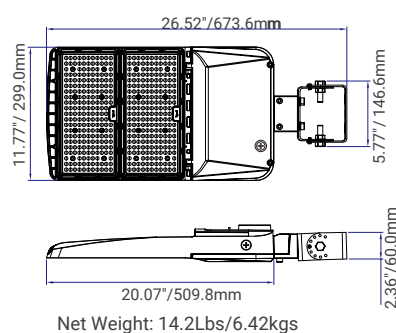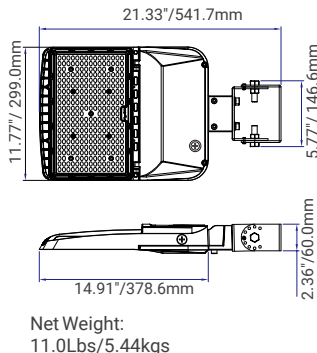

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.


PFX-3208

LED AREA LIGHT




DIMENSIONS AND WEIGHT


Universal bracket

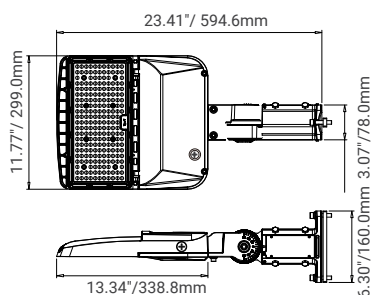

Net Weight: 10.6Lbs/4.80kgs

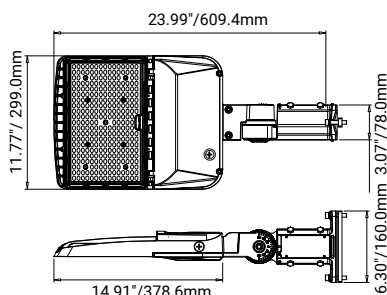


Net Weight: 12.5Lbs/5.69kgs

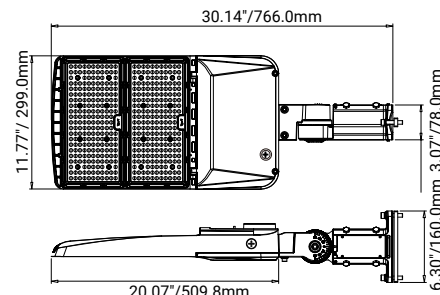


Net Weight: 14.7Lbs/6.67kgs


Adjustable Square & Round Pole Mount

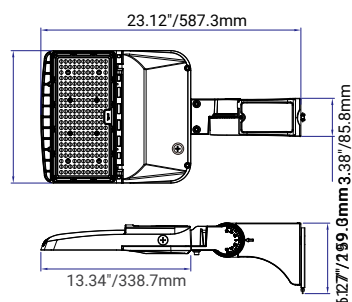

Net Weight: 10.5Lbs/4.74kgs

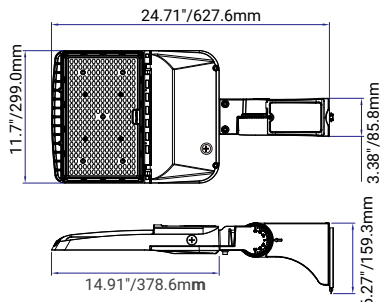

Net Weight:
12.2Lbs/5.52kgs

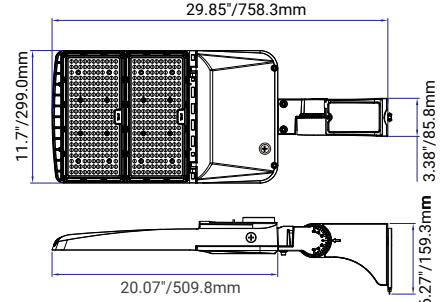

Net Weight: 4.5Lbs/6.59kgs

SHIPPING INFORMATION

Model	Carton Size (in)	G.W. (lbs)	Per carton (pcs)
PFX3208-ALH(80/100/120/150)W	15.59 x 13.07 x 5.24	8.42	1
PFX3208-ALH(170/200/220/240)W	17.17 x 13.07 x 5.24	9.70	1
PFX3208-ALH(240/260/280/310)W	22.32 x 13.07 x 5.71	11.73	1
PFX3208-ALHSQMD02 (Square & Round Pole Mount)	23.6 x 8.7 x 7.7	17.59	8
PFX3208-ALHSPMD01 (Slipfitter Mount)	14.8 x 9.8 x 7.9	20.35	8
PFX3208-ALHWMD01 (Wallmount)	17.3 x 13.2 x 8.9	21.75	8
PFX3208-ALHTRMD01 (Trunnion Mount)	12.8 x 11.6 x 7.5	24.21	8
PFX3208-ALHUVMD01 (Universal Bracket Mount)	14.4 x 14.0 x 9.3	28.68	8
ALHAAMD02 (Adjustable Square & Round Pole Mount)	20.5 x 15.6 x 6.7	28.70	8

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

