

PFX-3628 LED WATERPROOF CEILING LIGHT















DESCRIPTION

This LED Waterproof IP65 Rated Ceiling Light is designed to fit your wide ceiling light indoor/outdoor application demands The Switch CCT Adjustable function enables customer to change color based on their daily needs. Modern design to decorate the space.


SPECIFICATIONS						
Model No.	PFX-3628-WPCL8 -12W-3CCT	PFX-3628-WPCL12 -18W-3CCT	PFX-3628-WPCL16 -24W-3CCT			
Wattage	12W	18W	24W			
Size	8"	12"	16"			
Lumens	1000LM	1440LM	1920 LM			
Rated Input Voltage(V)	AC 120V					
Light Source	SMD					
CCT	CCT Selectable: 3000K/4000K/5000K					
Body	Polycarbonate Engineering Plastic					
Beam Angle (°)	120°					
Dimming	Traic Dimming					
Lumen Efficiency	80~85 Lm/W					
Color Rendering Index	Ra>80					
Power Factor	0.95					
Working Temperature	-4 ° F ~+105 °F / -15°C ~40°C					
Storage Temperature	-4 ° F ~+105° F / -15 ° C ~ +40 ° C					
Environment Location	IP 65 - Wet Location					
Lifespan	Lumen Maintenance over 70% @ 50,000+ Hours					
Body Finish	White					
Certificate	ETL					
Package Info	16.9"X11.8"X8.9"	24.8"X12.8"X12.8"	16.7"X12.8"X16.7"			
PC/ Master Pack	10	10	5			
Weight	10.67 LB	19.44 LB	15.73 LB			

APPLICATION



Application: Ideal for residential place, office, hallways, awning, utility room and commercial place such as hotel

ACCESSORIES

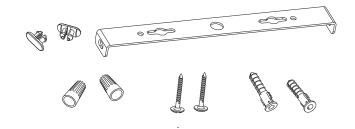

CCT Adjustable : Adjust CCT By ON/Off Wall Switch

 Color can be adjusted by quickly turn on/off the wall switch with 3 seconds



- on → 5000K → 3000K → 4000K
- Turn off the light and leave the light to stay off for more than 5 seconds, when you turn on the light next time, the CCT will be the same as the last time you used. To change color, go to step 1.
- Color Reset: to match the 2 fixtures with different color, turn the switch on/off for 7 times.

ORDERING GUIDE	PFX-30	628-WPCL8-12W3CCT		
Company Code	Product	Size	Power:	сст
PFX-3628	WPCL: Waterproof Ceiling Light	8"	12W	
		12"	18W	3 CCT Selectable: 3000K/4000K/5000K
		16"	24W	

Disclaimer

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.















PFX-3628

LED WATERPROOF CEILING LIGHT












PRODUCT DIMENSION


Front View


Side View



Model No. Size	PFX-3628-WPCL8-12W-3CCT	PFX-3628-WPCL12-18W-3CCT	PFX-3628-WPCL16-24W-3CCT
L1	Ф200mm/Ф7.87"	Ф300mm/Ф11.81"	Φ400mm/Φ15.75"
L2	Φ51mm/Φ2"	Φ56mm/Φ2.2"	Φ56mm/Φ2.2"


INSTALLATION GUIDE






1. Fixing bracket on terminal box

2. Wiring and color temperature adjustment

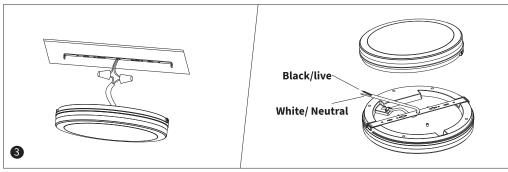

3. Connect black wire to live wire, white wire to neutral wire, and secure using wire nuts.

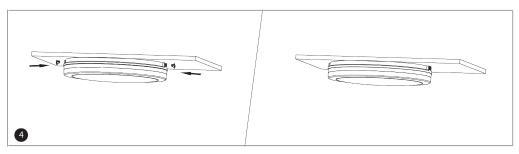

4. Fixing the lamp body on bracket and fix tightly

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.





