

# PFX-3412

BOLLARDS LIGHT  
CCT/Wattage Adjustable



## FEATURES

### HEAVY-DUTY HOUSING

Impact & weather resistance fixture with aluminum housing and polycarbonate lenses.

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### INPUT VOLTAGE

120-277 V Standard input

### DIMMING 0-10V

### OPERATING TEMPERATURE: -30°C TO 40°C

### PRODUCT APPLICATIONS


- Walkways
- Business Districts
- Playgrounds
- Parks & Recreational Fields
- Residential Areas
- Commercial Areas



## ORDERING GUIDE

Example: PFX-3412-SRB800-25W-50K-V8-D-RO-BZ						
MODEL	WATTAGE TUNABLE	COLOR TEMPERATURE	VOLTAGE	DIMMING OPTION	DISTRIBUTION	HOUSING COLOR
PFX-3412 SRB800 PFX-3412 ERB800	25W 25W/20W/15W Tunable	CCT 3K/4K/5K Selectable	V8 120-277V	D 0-10V DIMMING	RO 360	BZ BRONZE(STANDARD)

## PRODUCT DIMENSION

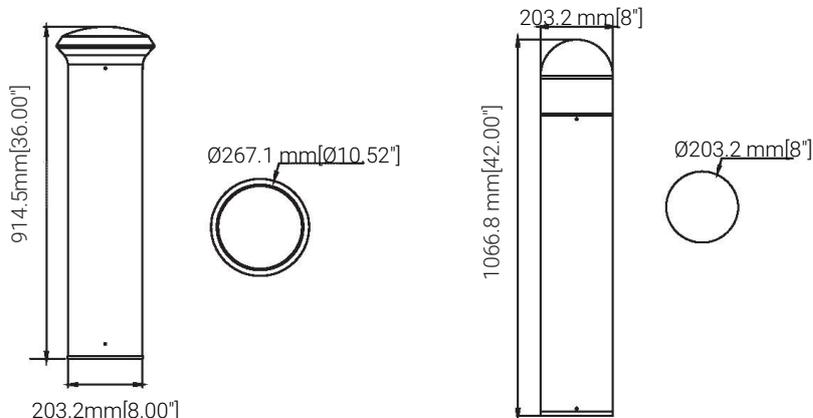

**Disclaimer:**  
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# PFX-3412

BOLLARDS LIGHT  
CCT/Wattage Adjustable




## PRODUCT SPECIFICATIONS

NOMENCLATURE	WATTAGE	SELECTABLE CCT	LUMEN	EFFICACY	INPUT VOLTAGE	CRI	DISTRIBUTION	OPERATING TEMP
PFX-3412 SRB800-25W ADJUSTABLE	15W	3000K	1726LM	115LPW	120-277V	>70	360°	-30 - 40°C
		4000K	1846LM	123LPW				
		5000K	1798LM	120LPW				
	20W	3000K	2227LM	111LPW				
		4000K	2403LM	120LPW				
		5000K	2320LM	116LPW				
	25W	3000K	2664LM	107LPW				
		4000K	2930LM	117LPW				
		5000K	2775LM	111LPW				
PFX-3412 ERB800-25W ADJUSTABLE	15W	3000K	1555LM	104LPW	120-277V	>70	360°	-30 - 40°C
		4000K	1693LM	113LPW				
		5000K	1620LM	108LPW				
	20W	3000K	2006LM	100LPW				
		4000K	2204LM	110LPW				
		5000K	2090LM	105LPW				
	25W	3000K	2400LM	96LPW				
		4000K	2688LM	108LPW				
		5000K	2500LM	100LPW				

## PHOTOMETRIC

PFX-3412-SRB800-25W-360°

MOUNTING HEIGHT = 3.50 FT

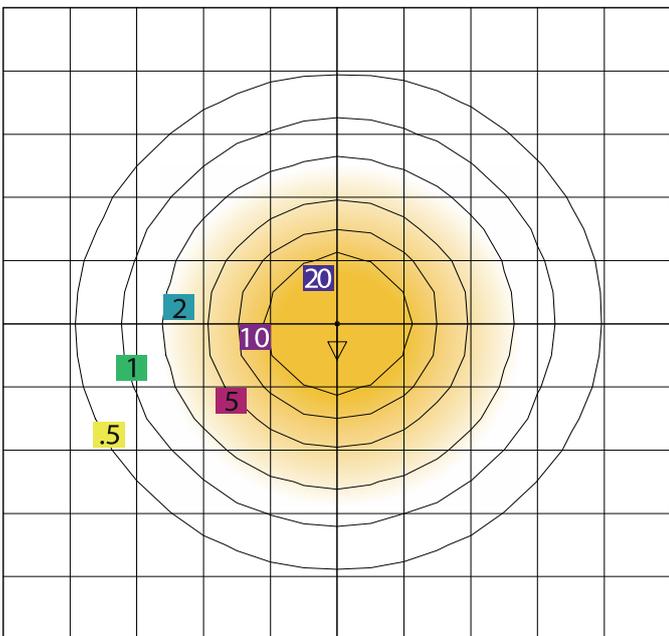

SCALE: 1 INCH = 5 FT.  
LIGHT LOSS FACTOR = 1.00

MAXIMUM CALCULATED VALUE = 76.50 FC  
FOOT CALDLE = .5 1 2 5 10 20

CCT / WATTAGE ADJUSTABLE



15W/20W/25W FIELD ADJUSTABLE  
3000K/4000K/5000K FIELD ADJUSTABLE

**Disclaimer:**

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.