

PFX-3407

BOLLARDS




DESCRIPTION

This attractive, newly redesigned heavy-duty bollard features full proof aluminum construction housing, providing corrosion and vandal resistance ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotel and parks. A solid foundation withstands the elements, driver options work in even the worst weather conditions.

FEATURES

- UL and CUL listed for wet locations
- Consisting of an extruded aluminium alloy body
Standard 4kV Surge
- UV stabilized powder coated finish
- High-impact polycarbonate diffuser
- Anodized aluminum reflector
- Finish - Bronze

DIMENSION (INCHES)

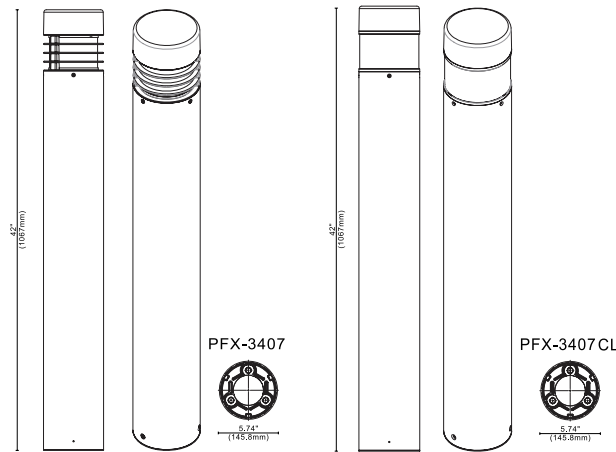

ORDERING GUIDE

Sample Part PFX-3407

Model No.	Nominal Watts**	Input Voltage	CRI	Color Temp*	Finish	Starting Temp
PFX-3407	020=20W	UNV=120-277V	7=70+	30=3000 K	Bronze	-40°C
	030=30W			40=4000 K		
				=		

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-3407
BOLLARDS



PERFORMANCE DATA

Model NO.	Nominal Watts**	Dist. Type	Lumens**	Efficacy**	B	U	G
PFX-3407CL	20 W	Type V	2456 lm	129 lm/W	1	3	2
	30 W	Type V	3410 lm	116 lm/W	1	3	2
	10/15/20W	Type V	2456 lm	129 lm/W	1	3	2
PFX-3407PL	20 W	Type V	706 lm	37 lm/W	1	3	2
	30 W	Type V	1231 lm	42 lm/W	1	3	2

**Lumen and Efficacy are based on highest wattage 5000K

PRODUCT DESCRIPTION

Extruded aluminum tube provides strength and durability as well as protects and conceals the component wiring

Terminal block provided on base bracket for easy installation of incoming supply wires

3 Wattage selectable exclusive for PFX-3407 CL

Quick disconnect located near the terminal block for simple connection to the LED driver.

Versatile mounting plate allows for easy installation and replacement for any project or development

LED compartment is airtight to prevent fogging and condensation build up and keep water out

Aluminum reflector designed to reduce glare and produce an even distribution

Clear UV resistant polycarbonate lens allows for optimal light transmission and protects the light engine compartment from harsh environments

Driver is mounted under the LED compartment for easy replacement and to protect from water that may accumulate in the base of the bollard. Torx security screws secure the LED compartment to the base to deter vandalism

PFX-3407PL PFX-3407 CL

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.