

# PFX-3602

## LED CANOPY LUMINAIRE



### FEATURES

#### COMPACT, HEAVY-DUTY HOUSING

The PFX-3602 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

#### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

#### EASY TO INSTALL MOUNTING

The PFX-3602 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

#### 120-277V STANDARD TYPE VS DISTRIBUTION OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option



#### PRODUCT APPLICATIONS

- Building Canopy
- Storage Facilities
- Parking Garages
- Gas Stations
- Tunnels

### SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMEN	EFFICACY	DLC V5.0 LISTING
24W	23.54	3000K	2,865.00	121.71	PREMIUM
24W	23.54	4000K	2,950.95	125.36	PREMIUM
24W	23.54	5000K	3,039.48	129.12	PREMIUM
36W	34.27	3000K	4,405.69	128.56	PREMIUM
36W	34.27	4000K	4,537.86	132.41	PREMIUM
36W	34.27	5000K	4,674.00	136.39	PREMIUM
48W	46.60	3000K	5,671.58	121.71	PREMIUM
48W	46.60	4000K	5,841.73	125.36	PREMIUM
48W	46.60	5000K	6,016.98	129.12	PREMIUM
60W	56.83	3000K	6,916.65	121.71	PREMIUM
60W	56.83	4000K	7,124.15	125.36	PREMIUM
60W	56.83	5000K	7,337.87	129.12	PREMIUM
72W	67.26	3000K	8,156.00	121.26	STANDARD
72W	67.26	4000K	8,400.68	124.90	PREMIUM
72W	67.26	5000K	8,652.70	128.65	PREMIUM

### DIMENSION (INCHES)

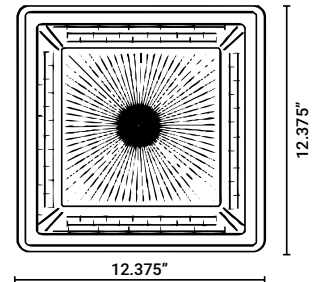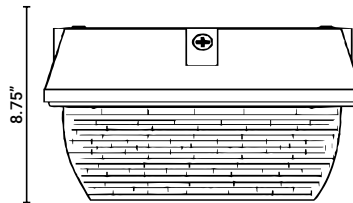

POWER POWER FACTOR >0.90 - THD <20

### ORDERING GUIDE

Sample Part PFX-3602-24W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PFX-3602				
	24W 24 WATTS	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR
	36W 36 WATTS	30K 3000K - WARM WHITE	WH WHITE	MS-D2 MOTION SENSOR WITH BILEVEL DIMMING
	48W 48 WATTS	35K 3500K - NEUTRAL WHITE	BL BLACK	D1 0-10V DIMMING
	60W 60 WATTS	40K 4000K - NEUTRAL WHITE	SL SILVER	D2 STEP DIMMING (120V ONLY)
	72W 72 WATTS	50K 5000K - COOL WHITE	CC CUSTOM COLOR	EM EMERGENCY BATTERY PACK
		57K 5700K - DAYLIGHT		V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH EM OR MOTION SENSOR

**Disclaimer:**

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.