

PFX-5502


THIN DIE-CAST ALUMINUM EXIT SIGN



SPECIFICATION

- Ultra bright, energy efficient, long life Red or Green LEDs.
- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- •2.4V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- •Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.
- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Quick-snap face plate closure.
- Specification-grade, low profile, thin aluminum die-cast design.
- Available in single or double face only.
- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C). • Certified to CEC under Title 20 Regulations.

DIMENSION (INCHES)

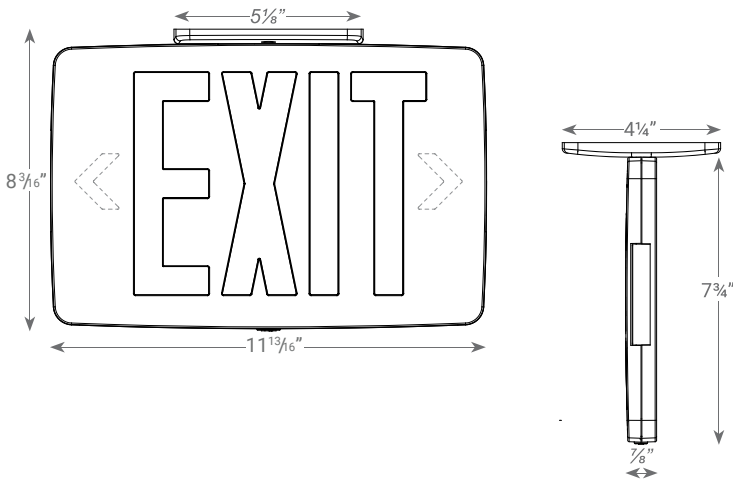

ORDERING GUIDE

Sample Part PFX-5502-KZXTEU1RW

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY	
PFX5502 KZXTEU	1	Single Face	R	Red	W	White	(blank)	AC-Only
	2	Double Face	G	Green	B	Black	EM	Battery Backup
					A	Aluminum		

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.