

PFX-3108

DC200-90 CUT-OFF LED WALLPACK LUMINAIRE



FEATURES

FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

TYPE VS DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option


PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC V5.0 LISTING
12W	12.65	3000K	1,530.00	120.95	PREMIUM
12W	12.65	4000K	1,606.50	127.00	PREMIUM
12W	12.65	5000K	1,686.83	133.35	PREMIUM
24W	23.68	3000K	3,060.00	129.22	PREMIUM
24W	23.68	4000K	3,213.00	135.68	PREMIUM
24W	23.68	5000K	3,373.65	142.47	PREMIUM
36W	34.27	3000K	4,008.38	116.96	PREMIUM
36W	34.27	4000K	4,208.79	122.81	PREMIUM
36W	34.27	5000K	4,419.23	128.95	PREMIUM
48W	45.80	3000K	5,344.50	116.69	PREMIUM
48W	45.80	4000K	5,611.73	122.53	PREMIUM
48W	45.80	5000K	5,892.31	128.65	PREMIUM
60W	56.83	3000K	6,680.63	117.55	PREMIUM
60W	56.83	4000K	7,014.66	123.43	PREMIUM
60W	56.83	5000K	7,365.39	129.60	PREMIUM
72W	67.65	3000K	8,016.75	118.50	STANDARD
72W	67.65	4000K	8,417.59	124.43	STANDARD
72W	67.65	5000K	8,838.47	130.65	STANDARD
84W	80.12	3000K	9,352.88	116.74	STANDARD
84W	80.12	4000K	9,820.52	122.57	STANDARD
84W	80.12	5000K	10,311.54	128.70	STANDARD
96W	91.65	3000K	10,689.00	116.63	STANDARD
96W	91.65	4000K	11,223.45	122.46	STANDARD
96W	91.65	5000K	11,784.62	128.58	STANDARD

DIMENSION (INCHES)

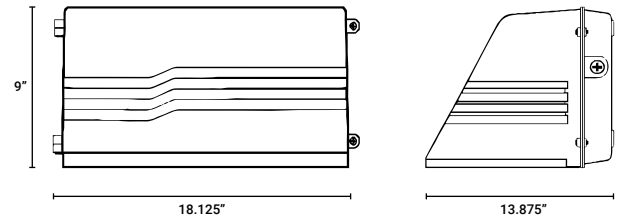

POWER

POWER FACTOR >0.90 - THD <20

ORDERING GUIDE

Sample Part # PFX-3108 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PFX-3108 (DC200-90)	12W 12 WATTS	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W 24 WATTS	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W 36 WATTS	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W 48 WATTS	40K 4000K - NEUTRAL WHITE	SL SILVER	MS-D2 MOTION SENSOR WITH BILEVEL DIMMING
	60W 60 WATTS	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D1 0-10V DIMMING
	72W 72 WATTS*	57K 5700K - DAYLIGHT		D2 STEP DIMMING (120V ONLY)
	84W 84 WATTS*			EM EMERGENCY BATTERY PACK
	96W 96 WATTS*			V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH EM, PHOTOCELL OR MOTION SENSOR

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.