

# PFX-3503

LED FLOODLIGHT LUMINAIRE



## FEATURES

### COMPACT, HEAVY-DUTY HOUSING

The DC545 is a 9" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC545 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available


### 120-277V STANDARD TYPE V DISTRIBUTION

### OPERATING TEMPERATURE -20C TO 40C

### PRODUCT APPLICATIONS

- Parking Lots
- Playgrounds
- Walkways
- Parks & Recreational Fields
- Buildings
- Loading Docks
- Signage

## DIMENSION (INCHES)

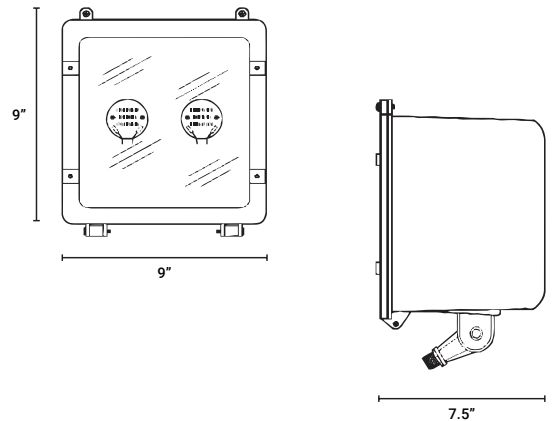

## SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC V5.0 LISTING
12W	12.72	3000K	1,408.25	110.71	STANDARD
12W	12.72	4000K	1,478.66	116.25	STANDARD
12W	12.72	5000K	1,552.60	122.06	PREMIUM
24W	23.68	3000K	2,816.50	118.94	PREMIUM
24W	23.68	4000K	2,957.32	124.89	PREMIUM
24W	23.68	5000K	3,105.19	131.13	PREMIUM
36W	34.27	3000K	4,224.75	123.28	PREMIUM
36W	34.27	4000K	4,435.99	129.44	PREMIUM
36W	34.27	5000K	4,657.79	135.91	PREMIUM
48W	45.70	3000K	5,633.00	123.26	PREMIUM
48W	46.60	4000K	5,914.65	126.92	PREMIUM
48W	46.60	5000K	6,210.38	133.27	PREMIUM

## ORDERING GUIDE

Sample Part PFX-3503

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PFX-3503	12W 12 WATTS 24W 24 WATTS 36W 36 WATTS 48W 48 WATTS	27K 2700K - WARM WHITE 30K 3000K - WARM WHITE 35K 3500K - NEUTRAL WHITE 40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE 57K 5700K - DAYLIGHT	BZ BRONZE (STANDARD) WH WHITE BL BLACK SL SILVER CC CUSTOM COLOR	D1 0-10V DIMMING D2 STEP DIMMING (120V ONLY) PT POST TOP FITTER V1 480/347V INPUT (120-277V STANDARD)

**Disclaimer:**

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.