


PFX-3411

WALKWAY BOLLARD COMMERCIAL LIGHTING



DIMENSION (INCHES)

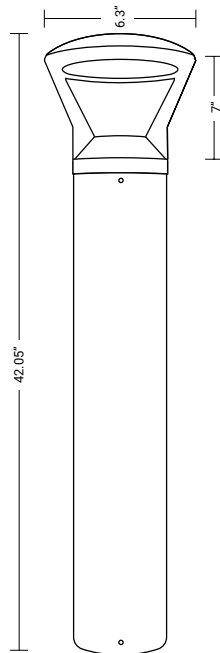

SPECIFICATIONS

Paraflex Lighting's PFX-3411 Bollard adds a modern look to any pathway. This fixture is available in LED. Features Switchable Lumen/ Wattage, and Tunable CCT. UL listed and suitable for wet locations. PFX-3411 is designed for low mounting in reinforced concrete (by others), hardware and template is included.

FEATURES

- Tunable CCT
- Switchable Lumen/Wattage
- Powder Coated Finish
- Aluminum Housing
- Polycarbonate Lens
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations
- 3 Anchor Bolts & Template Included

LED SOURCE OPTIONS

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L70
- Max 20kASurge Supression
- 3000K or 4000K CCT 80CRI
- 0 - 10V Dimming
- 5 Year Warranty

ORDERING GUIDE

Sample Part PFX-3411

ITEM

LENS

LED LIGHT SOURCE

CCT

COLOR

PFX-3411

POLYCARBONATE
C-Clear

120-277V MULTI-VOLT
L24- Switchable 14W , 1700lm
19W, 2300lm; or 24W, 3000lm

S-Switchable
3K, 4K & 5 K

BK-Black
BZ-Bronze

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.