

# PARAFLEX

Fast Flexible Focused Lighting

## SERIES - 3100-Wall Pack

**PFX-3116**



### APPLICATIONS

	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges



PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.


A 3 Luger Rd. #1 - Denville, NJ 07834

E [info@paraflex.com](mailto:info@paraflex.com)

W [www.paraflex.com](http://www.paraflex.com)

P 973-340-6040

### Product Description:

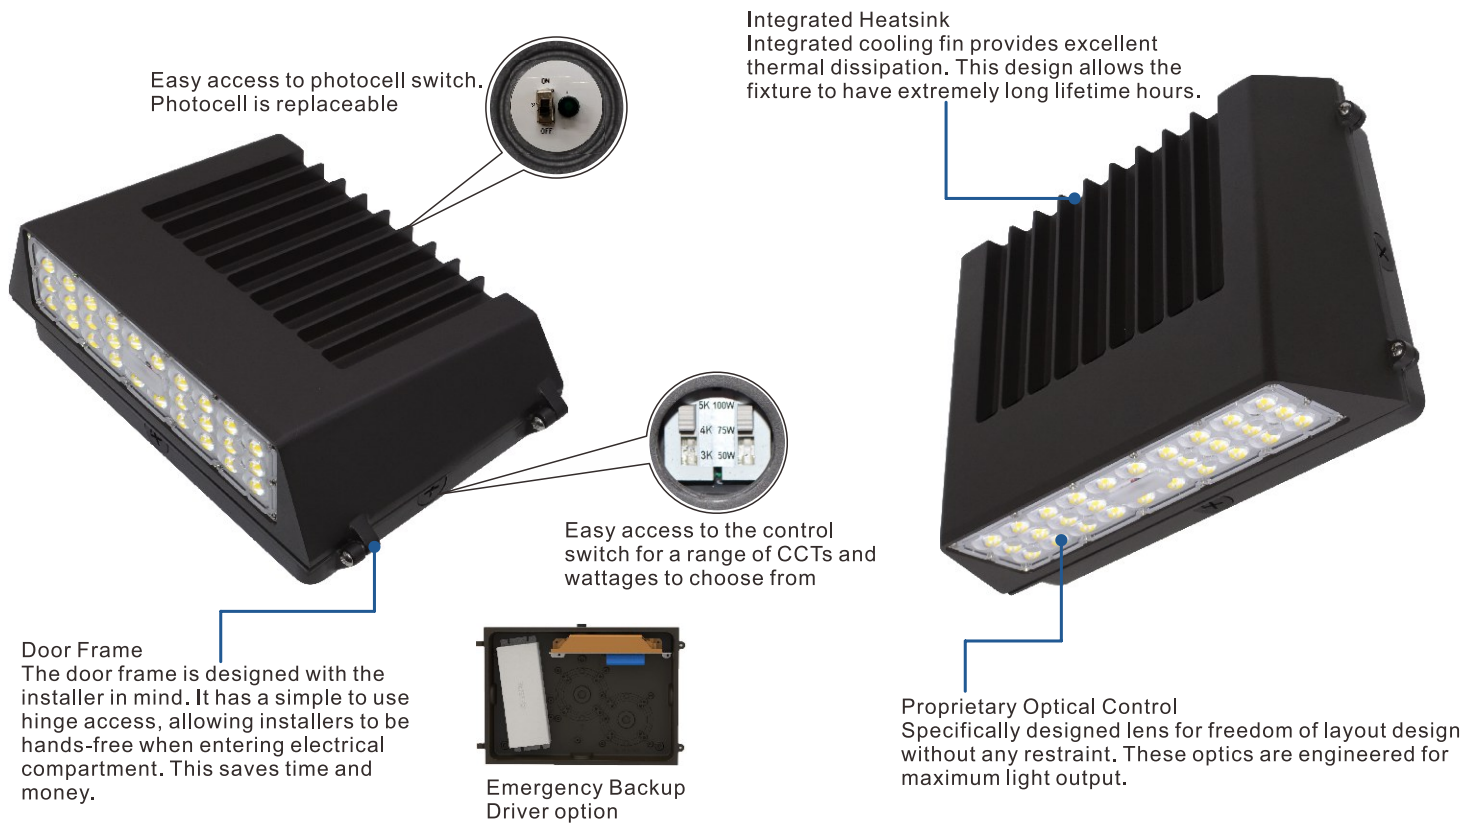

Easy access to photocell switch. Photocell is replaceable

**Integrated Heatsink**  
Integrated cooling fin provides excellent thermal dissipation. This design allows the fixture to have extremely long lifetime hours.

Easy access to the control switch for a range of CCTs and wattages to choose from

**Door Frame**  
The door frame is designed with the installer in mind. It has a simple to use hinge access, allowing installers to be hands-free when entering electrical compartment. This saves time and money.

Emergency Backup Driver option

**Proprietary Optical Control**  
Specifically designed lens for freedom of layout design without any restraint. These optics are engineered for maximum light output.

### Product Description:

The PFX-3116 is a powerful luminaire that has been designed to meet a wide variety of locations. With the various mounting options it can be used as a flood light or as an area light. With the LEDs mounted on the large heatsink, the fixture can maintain a high lumen output while keeping the LED modules at a cool temperature.

Optional Kelvin color\* with adder.

### Features:

- LISTING**  
UL and CUL listed for wet locations
- HOUSING**  
Heavy duty die-cast aluminum powder coating, corrosion resistant hardware
- FINISH**  
UV stabilized powder coated finish
- LENS**  
Heat and impact PC Lens
- OPTIONS**  
Wide / narrow distribution available with adder  
Finish - Bronze. Color option with adder



PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

### Performance Data

Model NO.	System Watts	Lumens	LPW
PFX-3116-L70	20/30/40W	5539 lm**	135 lm/w
PFX-3116-L112	25/45/65W	9044 lm**	143 lm/w
PFX-3116-L112	35/55/75W	10420 lm**	137 lm/w

### Specification:


Example:LED-3110

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option	Finish	Starting Temp
						Accessories		
PFX-3116-L70	40=40W	UNV=120-277V	7=70+	40=4000 K	T3=Type III	PE=Photocontrol EM=Emergency Driver FAO=FAO Controller	BZ=Bronze	-40°C
PFX-3116-L112	65=65W			50=5000 K	T4=Type IV			
PFX-3116-L112	75=75W							

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

### Dimension:

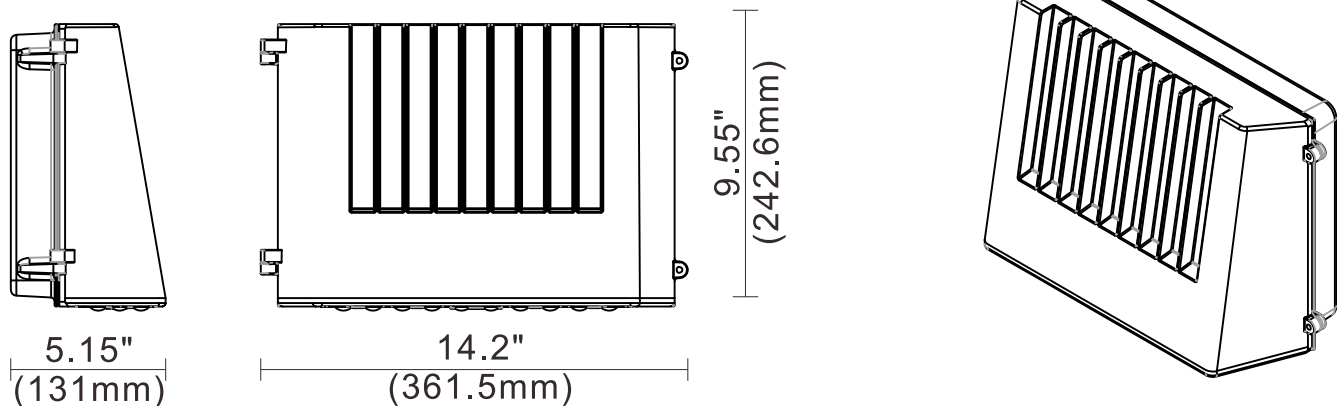

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.