

# **PFX-3624**

LED Disk Light


















SPECIFICATIONS					
Model No.	PFX-3624-DSL-R4-10W-3CCT	PFX-3624-DSL-R6-15W-3CCT			
Wattage	10W	15W			
Size	4"	6"			
Lumens	650 LM	1000 LM			
Rated Input Voltage(V)	AC120V 60Hz				
CCT	CCT Selectable: 3000K/4000K/5000K				
Beam Angle (°)	120°				
Dimming	Triac dimming				
Color Rendering Index	Ra>80				
Power Factor	0.95				
Working Temperature	-4 ° F ~+105 °F / -15°C ~40°C				
Environment Location	IP 20 – Suitable for Damp Location				
Lifespan	Lumen Maintenance over 70% @ 50,000+ Hours				
Body Finish	White				
Certificate	ETL/Energy Star				
Package Info	19.3"X7.5"X13.2"	23.4"X7.5"X15.9"			
PC/ Master Pack	30	30			
Weight	13.9 LB	19.2LB			

## **Description**

LED Disk Lights, the modern Surface Mount lighting solution for easy ceiling installation. These sleek lights require no recessed housing and can be directly wired to a 4"/6" junction box. Enjoy instant, bright illumination in your kitchen, bedroom, bathroom, and more. Upgrade your space with effortless style and functionality.

#### Structure

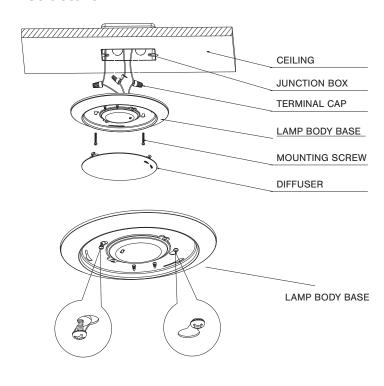

### **ORDERING GUIDE**

EXAMPLE: PFX-3624-DSL-R4-10W-3CCT					
Model	Product	Size	Watt	сст	
PFX-3624 DSL: Disk Light	R4: Round 4 inch	10W	3 CCT Selectable:		
	R6: Round 6 inch	15W	3000K/4000K/5000K		

Note: Includes a pre-installed dusk-to-dawn light photocell sensor

#### Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.













# **PFX-3624**

LED Disk Light
















### **PRODUCT DIMENSION**







Model No.	PFX-3624 -DSL-R4-10W-3CCT	PFX-3624-DSL-R6-15W-3CCT	
L1	Ф150mm/Ф5.9"	Ф185mm/Ф7.28"	
L2	25mm/0.98"	25mm/0.98"	

# **INSTALLATION GUIDE**


#### 1 CCT Adjustable



#### 2 Wiring Guide



# **PHOTOMETRIC REPORT**

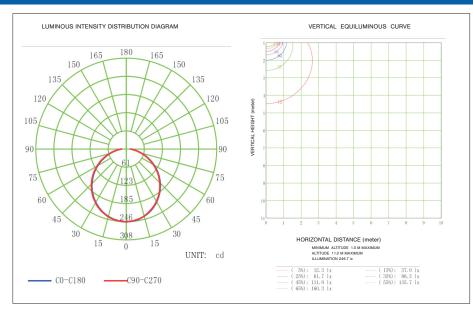



Application: Ideal for residential place, office, hallways, utility room and commercial place such as hotel rooms.

#### Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.











