


PFX-3409
OUTDOOR BOLLARD

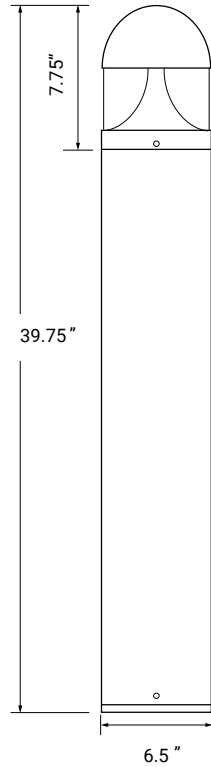

Paraflex Lighting's PFX-3409 Bollard adds a modern look to any pathway. This fixture is available LED and its industrial strength features make it ETL listed and suitable for wet locations. PFX-3409 is designed for low mounting in reinforced concrete (by others), hardware and template is included.

FEATURES


- UL and CUL listed for wet locations
- Die-cast aluminum body
- New generation COB technology
- UV stabilized powder coated finish
- Heat and impact resistant borosilicate glass
- Finish - Bronze. Color option with adder

LED SOURCE OPTIONS

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L70
- Max 20kASurge Supression
- 3000K or 4000K CCT 80CRI
- 0 - 10V Dimming
- 5 Year Warranty

SPECIFICATIONS

- Powder Coated Finish
- Aluminum Housing
- Mounting Hardware Included
- Polycarbonate Lens
-



Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)

ORDERING GUIDE

Sample Part PFX-3409

ITEM #

LENS

LED LIGHT SOURCE

CCT

COLOR

PFX-3409

POLYCARBONATE
C-Clear

120-277V MULTI-VOLT
L20-20W, 1400lm

C-4K
W-3K

BK-Black
BZ-Bronze

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.