

**FLEXLED**  
**CV303**  
 MEDIUM LED CANOPY



5 YEAR STANDARD WARRANTY | RATED LIFE: 85,000 HOURS+

**HOUSING:**

Die Cast Aluminum with Bronze Powder Coat and Prismatic Polycarbonate Diffuser with UV inhibitors.

**MOUNTING:**

Direct over 4" outlet box or surface wired through 1/2" conduit entries.

**DRIVER:**

Constant Current Class 2 100-277 VAC 50/60Hz  
 Power Factor: >0.98

**CERTIFICATIONS:**

Conforms to UL Standards UL-8750 and UL-1598. ETL Listed for USA and Canada. Certified to CSA22.2

**ENVIRONMENT:**

Outdoor/Wet Location  
 IP65 Rated

**ARRA COMPLIANT:**

Buy American Compliant under Section 1605 of the American Re-Investment and Recovery Act.

**ORDERING GUIDE**


STANDARD CONFIGURATION: CV303.28W.40K

MODEL	WATTS	COLOR TEMPERATURE (CCT)	ACCESSORIES
CV303*	14W	30K 3000K - Warm White	DIM Accessory - 0-10V Dimmable Driver
	28W*	40K* 4000K - Neutral White	R300755 Accessory - 120V Photocell
	42W*	50K 5000K - Cool White	R300756 Accessory - 208V/277V Photocell
	56W	55K 5500K - Daylight	

**SPECIFICATIONS**

WATTS	DELIVERED LUMENS	EFFICACY	CRI	~HID
14W	1,380lm	110 lm/W	>85	100W
28W	2,660lm	110 lm/W	>85	175W
42W	4210lm	115 lm/W	>85	250W
56W	5,440lm	115 lm/W	>85	400W

**DIMENSIONS**

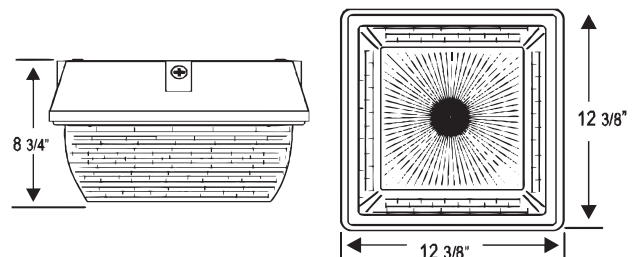

Specifications subject to change without notice. \* Indicates DLC Qualified Product