

**FLEXLED**  
**DC545**  
 MEDIUM LED FLOOD



5 YEAR STANDARD WARRANTY | RATED LIFE: 85,000 HOURS+



**HOUSING:**

Die Cast Aluminum with Bronze Powder Coat and Heat and Impact Resistant Glass

**MOUNTING:**

Integral 1/2" male threaded end.  
 Optional Post Top Fitter available.

**DRIVER:**

Constant Current Class 2 100-277 VAC 50/60Hz  
 Power Factor: >0.98

**CERTIFICATIONS:**

Conforms to UL Standards UL-8750 and UL-1598. ETL Listed for USA and Canada. Certified to CSA22.2

**ENVIRONMENT:**

Outdoor/Wet Location  
 IP65 Rated

**ARRA COMPLIANT:**

Buy American Compliant under Section 1605 of the American Re-Investment and Recovery Act..

**ORDERING GUIDE**


STANDARD CONFIGURATION: DC545.28W.40K

MODEL	WATTS	COLOR TEMPERATURE (CCT)	ACCESSORIES
DC545	14W	30K 3000K - Warm White	DIM Accessory - 0-10V Dimmable Driver
	28W	40K 4000K - Neutral White	R303604 Accessory - Post Top Fitter
	42W	50K 5000K - Cool White	
		55K 5500K - Daylight	

**SPECIFICATIONS**

WATTS	DELIVERED LUMENS	EFFICACY	CRI	~HID
14W	1,380lm	110 lm/W	>85	100W
28W	2,660lm	110 lm/W	>85	175W
42W	4,210lm	115 lm/W	>85	250W

**DIMENSIONS**

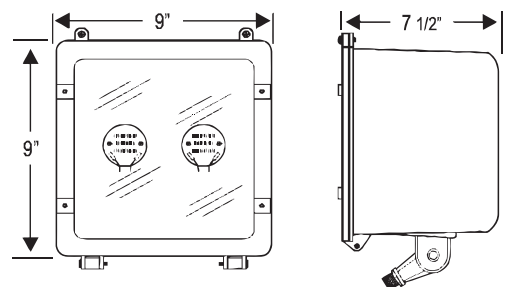

Specifications subject to change without notice.