

DC200-QS
LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 17 0903



LARGE, HEAVY-DUTY HOUSING

The DC200 is a Large 18" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells


ORDERING GUIDE

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200	QS	14W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		28W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		42W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		56W			EM EMERGENCY BATTERY PACK
		70W			
		84W			

PRODUCT SPECIFICATIONS

WATTAGE	SYSTEM W	DELIVERED LUMENS	EFFICACY	CRI
14W	12W	1,645 LM	132 LM/W	>85
28W	24W	3,015 LM	128 LM/W	>85
42W	35W	4,595 LM	133 LM/W	>85
56W	48W	6,250 LM	130 LM/W	>85
70W	59W	7,610 LM	129 LM/W	>85
84W	71W	9,190 LM	129 LM/W	>85

PRODUCT DIMENSIONS

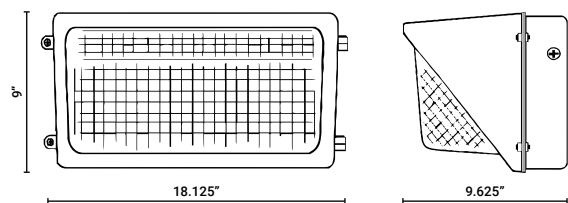

QUICK SHIP SHIPPING TERMS

QUANTITY	SHIPS	QUANTITY	SHIPS
1-5 PCS Before 11AM EST	Same Day	100-200 PCS	2 Weeks
1-10 PCS After 11AM EST	Next Day	200-1000PCS	2-4 Weeks
10-50 PCS	2 Days		