

DC560-QS
LED FLOODLIGHT LUMINAIRE

PROJECT
NOTES

DATE

TYPE



REV: 17 0903



COMPACT, HEAVY-DUTY HOUSING

The DC560 is a 12"x 8" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC560 comes standard with an Integral 1/2" Female Threaded Mount

120-277V STANDARD

PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks


ORDERING GUIDE

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC560	QS	14W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		28W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		42W	50K 5000K - COOL WHITE		
		56W			

PRODUCT SPECIFICATIONS

WATTAGE	SYSTEM W	DELIVERED LUMENS	EFFICACY	CRI	EPA
14W	12W	1,645 LM	132 LM/W	>85	
28W	24W	3,015 LM	128 LM/W	>85	
42W	35W	4,595 LM	133 LM/W	>85	
56W	48W	6,250 LM	130 LM/W	>85	

PRODUCT DIMENSIONS

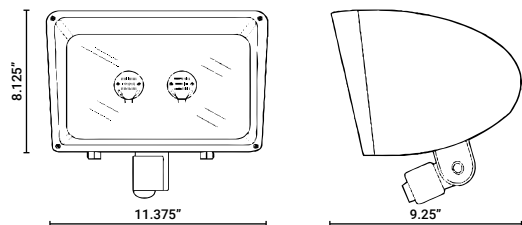

QUICK SHIP SHIPPING TERMS

QUANTITY	SHIPS	QUANTITY	SHIPS
1-5 PCS Before 11AM EST	Same Day	100-200 PCS	2 Weeks
1-10 PCS After 11AM EST	Next Day	200-1000PCS	2-4 Weeks
10-50 PCS	2 Days		