

ZVT

LED VAPORTIGHT LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 17 1002



LOW PROFILE, IP-67 RATED HOUSING

The Compact Housing is constructed with a Die Cast Aluminum Body, Impact Resistant Lens and Gasket-Tight Seal

EASY TO INSTALL MOUNTING HARDWARE

The ZVT comes standard with Stainless Steel External Mounting Clips with V-Hangers for Quick and Easy Installation

HIGH PERFORMANCE HEATSINK

Built-In Aluminum Heatsink provides Enhanced Thermodynamics to help Extend the Lifespan of the ZVT

120-277V STANDARD

PRODUCT APPLICATIONS


- Building Canopy
- Parking Garages
- Tunnels
- Cold Storage
- Storage Facilities
- Gas Stations

ORDERING GUIDE

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTIONS & ACCESSORIES
ZVT	47W	40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE	D1 0-10V DIMMING

PRODUCT SPECIFICATIONS

SYSTEM WATTS	DELIVERED LUMENS	EFFICACY	CRI
47W	3,800 LM	80 LM/W	>80

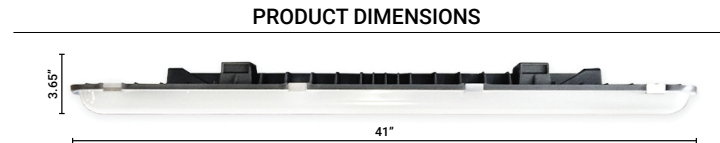

PRODUCT IMAGERY



POLYCARBONATE LENS



DIE-CAST ALUMINUM HEATSINK