



**PARAFLEX**  
*Fast Flexible Focused Lighting*



**QUICK SHIP**

**2018**  
*Quick Ship Catalog*  
April 2018



***FAST***  
***FLEXIBLE***  
***FOCUSED***



## *Table Of Contents*

- 4 About Us
- 6 Product Overview
- 8 QuickShip Catalog


## // *The Paraflex* **Way**

For over **50 years**, Paraflex Industries has manufactured high quality products for the Lighting Industry. Paraflex prides itself on providing customers with access to the latest advancements in lighting technology while not compromising its core values.



## Fast Solutions

From Quotes to Orders to Shipping PARAFLEX has developed the internal processes to quickly serve your project needs.



## Flexible Products

PARAFLEX offers customers with configurable lighting products built to serve a wide variety of project applications.



## Focused on Service

Our team of experts is ready to serve our customers in a very timely and efficient manner. Reach out today and experience The PARAFLEX Way!



**QUICK SHIP**

## **QUICK SHIP**

1 day: 1-5 pcs

3 days: 5-25 pcs

1 week: 25-100 pcs


# // AVAILABLE PRODUCTS

## WALLPACK

---



DC102-QS



DC150-QS




DC200-QS



DC150-90-QS



DC200-90-QS



DCSHM-QS



DCSHM-UD-QS



DCST-QS

## CANOPY & GARAGE

---



CV203-QS



CV303-QS



CV304-QS



CV156-QS

## FLOODLIGHTS

---



DC531-QS



DC545-QS



DC560-QS



DC400-QS



DC570-QS

# DC102-QS

LED WALLPACK LUMINAIRE



### COMPACT, HEAVY-DUTY HOUSING

The DC102 is a Small 9" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC102 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells
- Building Exteriors

## ORDERING GUIDE

Sample Part # DC102 - QS - 12W - 30K - BZ - PC1


MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC102	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

## PRODUCT DIMENSIONS

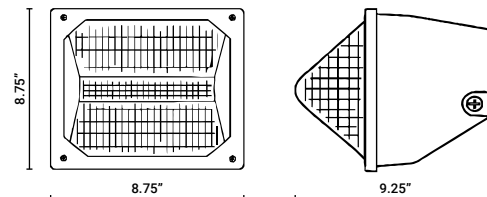

## POWER

POWER FACTOR >90 - THD <20



# DC150-QS

LED WALLPACK LUMINAIRE



### HEAVY-DUTY HOUSING

The DC150 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC150 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

## ORDERING GUIDE

Sample Part # DC150 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC150	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			
		60W			


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

### PRODUCT DIMENSIONS

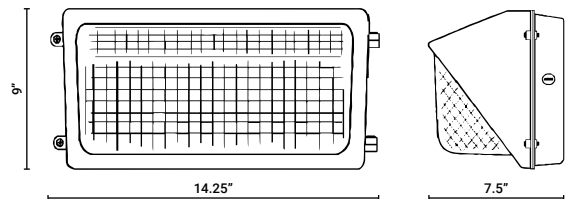

### POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# DC200-QS

LED WALLPACK LUMINAIRE



### LARGE, HEAVY-DUTY HOUSING

The DC200 is a Large 18" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC200 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

## ORDERING GUIDE Sample Part # DC200 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			EM EMERGENCY BATTERY PACK
		60W			
		72W			
		84W			
		96W			


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

## PRODUCT DIMENSIONS

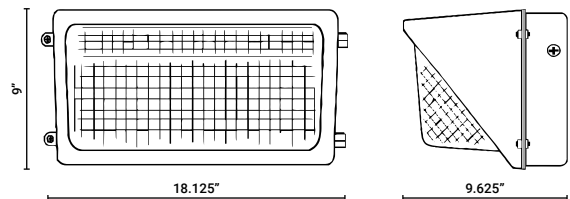

## POWER

POWER FACTOR >90 - THD <20

# DC150-90-QS

CUT-OFF LED WALLPACK LUMINAIRE



### FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC150-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC150-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

## ORDERING GUIDE

Sample Part # DC150-90 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC150-90	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			
		60W			


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95
96W	92.10	5000K	12,083	131.19

## PRODUCT DIMENSIONS

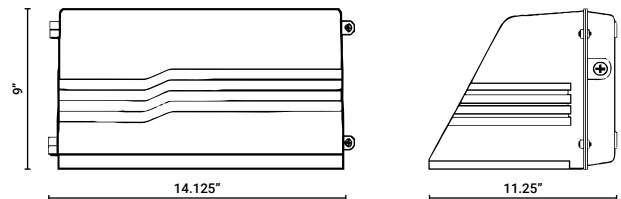

## POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# DC200-90-QS

CUT-OFF LED WALLPACK LUMINAIRE



### FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

**ORDERING GUIDE** Sample Part # DC200-90 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200-90	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			EM EMERGENCY BATTERY PACK
		60W			
		72W			
		84W			
		96W			


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

### PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95

### PRODUCT DIMENSIONS

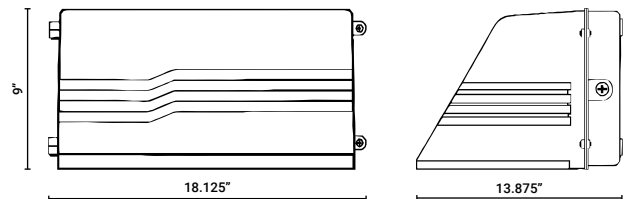

### POWER

POWER FACTOR >90 - THD <20

# DCSHM-QS

ROUND LED WALLPACK LUMINAIRE



### FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

## ORDERING GUIDE

Sample Part # DCSHM - QS - 12W - 30K - BZ - EM

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCSHM	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	EM EMERGENCY BATTERY PACK
		24W	40K 4000K - NEUTRAL WHITE		
		36W	50K 5000K - COOL WHITE		
		48W			
		60W			


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

## PRODUCT DIMENSIONS

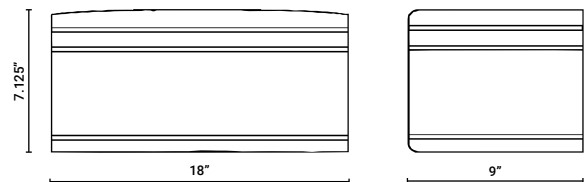

## POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# DCST-QS

CUT-OFF LED WALLPACK LUMINAIRE



**FULL CUT-OFF, HEAVY-DUTY HOUSING**

The DCST is a 14" Trapezoid Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The DCST can be Directly Mounted over an Existing 4" Outlet Box with a 4" x 4" Gasketed Wall Plate

**120-277V STANDARD**

**PRODUCT APPLICATIONS**

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

**ORDERING GUIDE** Sample Part # DCST - QS - 12W - 30K - BZ - EM

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCST	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	EM EMERGENCY BATTERY PACK
		24W	40K 4000K - NEUTRAL WHITE		
		36W	50K 5000K - COOL WHITE		
		48W			
		60W			


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

**PRODUCT DIMENSIONS**

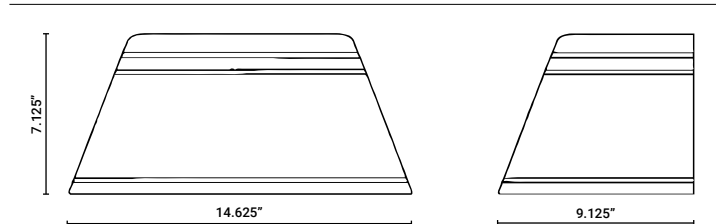

**POWER**

POWER FACTOR >90 - THD <20

# CV203-QS

LED CANOPY LUMINAIRE



### COMPACT, HEAVY-DUTY HOUSING

The CV203 is a 9" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The CV203 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Building Canopy
- Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations

## ORDERING GUIDE

Sample Part # CV203 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV203	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

## PRODUCT DIMENSIONS

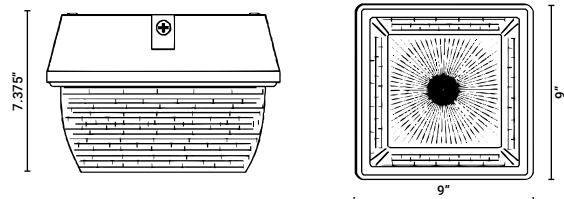

## POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# CV303-QS

LED CANOPY LUMINAIRE



**COMPACT, HEAVY-DUTY HOUSING**

The CV303 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The CV303 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

**120-277V STANDARD**

**PRODUCT APPLICATIONS**

- Building Canopy
- Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations


**ORDERING GUIDE** Sample Part # CV303 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV303	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			EM EMERGENCY BATTERY PACK
		60W			
		72W			
					<b>QUANTITY</b>
					<b>SHIPS</b>
					1-5 Pieces (Before 11AM EST)
					5-25 Pieces
					25-100 Pieces
					Same Day
					3 Days
					1 Week

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05

**PRODUCT DIMENSIONS**

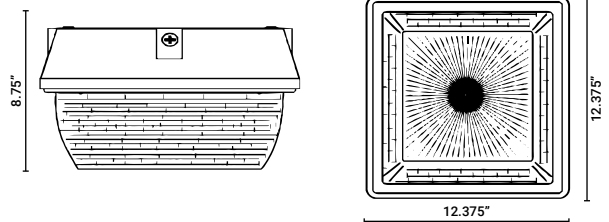

**POWER**

POWER FACTOR >90 - THD <20



# CV304-QS

LED CANOPY LUMINAIRE



**COMPACT, HEAVY-DUTY HOUSING**

The CV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The CV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

**120-277V STANDARD**

**PRODUCT APPLICATIONS**

- Building Canopy
- Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations


**ORDERING GUIDE** Sample Part # CV304 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES	
CV304	QS			BZ		
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL	
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL	
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR	
		48W			EM EMERGENCY BATTERY PACK	
		60W				
		72W				
					<b>QUANTITY</b>	<b>SHIPS</b>
					1-5 Pieces (Before 11AM EST)	Same Day
					5-25 Pieces	3 Days
					25-100 Pieces	1 Week

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05

**PRODUCT DIMENSIONS**

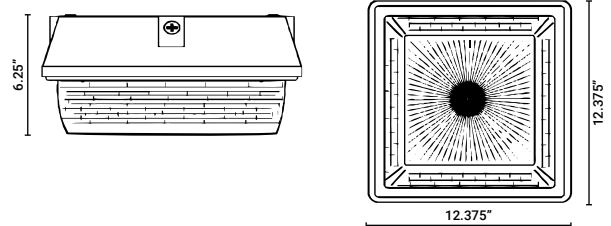

**POWER**

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# CV15G-QS

LED CANOPY LUMINAIRE



**COMPACT, HEAVY-DUTY HOUSING**

The CV15G is a 15" Circular Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The CV15G can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

**120-277V STANDARD**

**PRODUCT APPLICATIONS**

- Building Canopy                      Storage Facilities
- Parking Garages                      Gas Stations
- Tunnels


**ORDERING GUIDE** Sample Part # CV15G - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV15G	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			EM EMERGENCY BATTERY PACK
		60W			
		72W			
		84W			
		96W			
					<b>QUANTITY</b>
					<b>SHIPS</b>
					1-5 Pieces (Before 11AM EST)      Same Day
					5-25 Pieces      3 Days
					25-100 Pieces      1 Week

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95

**PRODUCT DIMENSIONS**

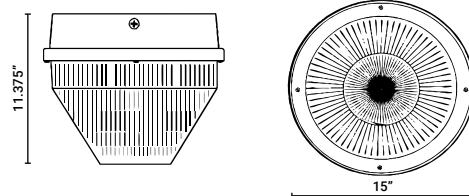

**POWER**

POWER FACTOR >90 - THD <20

# DC531-QS

LED FLOODLIGHT LUMINAIRE



**COMPACT, HEAVY-DUTY HOUSING**

The DC531 is a Small Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The DC531 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

**120-277V STANDARD**

**PRODUCT APPLICATIONS**

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

**ORDERING GUIDE** Sample Part # DC531 - QS - 12W - 30K - BZ - PC1


MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC531	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		PT POST TOP FITTER

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

**PRODUCT DIMENSIONS**

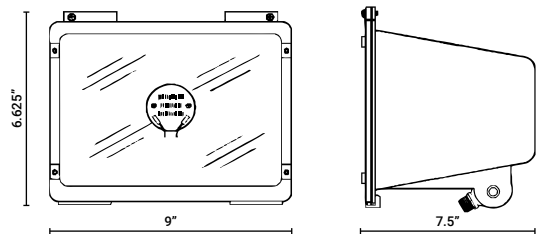

**POWER**

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# DC545-QS

LED FLOODLIGHT LUMINAIRE



### COMPACT, HEAVY-DUTY HOUSING

The DC545 is a 9" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC545 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

**ORDERING GUIDE** Sample Part # DC545 - QS - 12W - 30K - BZ - PT


MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC545	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PT POST TOP FITTER
		24W	40K 4000K - NEUTRAL WHITE		
		36W	50K 5000K - COOL WHITE		
		48W			

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

### PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38

### PRODUCT DIMENSIONS

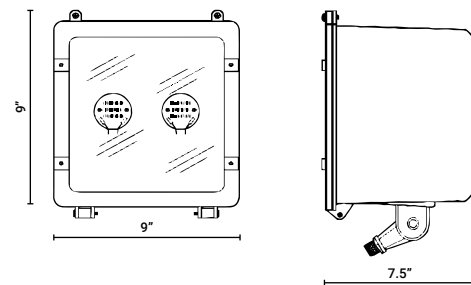

### POWER

POWER FACTOR >90 - THD <20

# DC560-QS

LED FLOODLIGHT LUMINAIRE



### COMPACT, HEAVY-DUTY HOUSING

The DC560 is a 12"x 8" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC560 comes standard with an Integral 1/2" Female Threaded Mount

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

## ORDERING GUIDE

Sample Part # DC560 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC560	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		
		48W			


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38

## PRODUCT DIMENSIONS

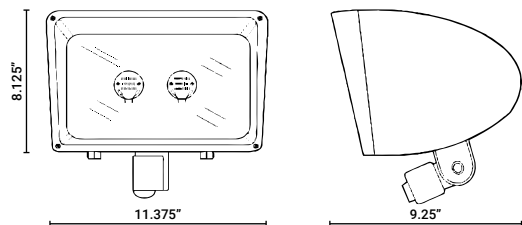

## POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

# DC400-QS

LED FLOODLIGHT LUMINAIRE



### COMPACT, HEAVY-DUTY HOUSING

The DC400 is a 16"x 10" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### VERSATILE MOUNTING OPTIONS

The DC400 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

## ORDERING GUIDE


Sample Part # DC400 - QS - 12W - 30K - BZ - NA - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES	
DC400	QS			BZ			
		12W	30K 3000K - WARM WHITE	BZ BRONZE	NA NONE (BY OTHERS)	PC1 120V PHOTOCELL	
		24W	40K 4000K - NEUTRAL WHITE		TR TRUNNION MOUNT	PC2 208/277V PHOTOCELL	
		36W	50K 5000K - COOL WHITE		SF SLIP-FITTER	MS MOTION SENSOR	
		48W			ST STRAIGHT ARM	EM EMERGENCY BATTERY PACK	
		60W					
		72W					
		84W					
		96W					
						<b>QUANTITY</b>	
						<b>SHIPS</b>	
						1-5 Pieces (Before 11AM EST)	Same Day
						5-25 Pieces	3 Days
						25-100 Pieces	1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95

## PRODUCT DIMENSIONS

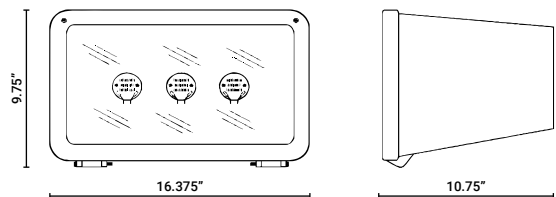

## POWER

POWER FACTOR >90 - THD <20

# DC570-QS

LED FLOODLIGHT LUMINAIRE



### COMPACT, HEAVY-DUTY HOUSING

The DC570 is a 16" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### VERSATILE MOUNTING OPTIONS

The DC570 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks


**ORDERING GUIDE** Sample Part # DC570 - QS - 12W - 30K - BZ - NA - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES
DC570	QS			BZ		
		12W	30K 3000K - WARM WHITE	BZ BRONZE	NA NONE (BY OTHERS)	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		TR TRUNNION MOUNT	PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		SF SLIP-FITTER	MS MOTION SENSOR
		48W			ST STRAIGHT ARM	EM EMERGENCY BATTERY PACK
		60W				
		72W				
		84W				
		96W				
					<b>QUANTITY</b>	<b>SHIPS</b>
					1-5 Pieces (Before 11AM EST)	Same Day
					5-25 Pieces	3 Days
					25-100 Pieces	1 Week

### PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95
96W	92.10	5000K	12,083	131.19

### PRODUCT DIMENSIONS

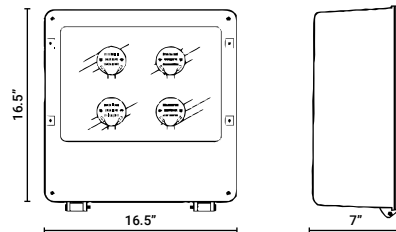

### POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



**3 Luger Rd. #1**

**Denville, NJ 07834**

**PHONE // (973) 340-6040**

**WEB // [www.paraflex.com](http://www.paraflex.com)**