

PARAFLEX
GRIDLITE SERIES

Low-Profile Linear LED Luminaire





DESIGN FLEXIBILITY



PRODUCT FEATURES

ALUMINUM HOUSING & HEATSINK

Rigid Frame for Linear Mounting & Heat Dissipation

SLEEK ARCHITECTURAL PROFILE



Less Than .5" Tall

HIGH OUTPUT LED PERFORMANCE

Up to 120 Lumens per Watt


CCT VARIETY

3000K - 3500K - 4000K - 5000K

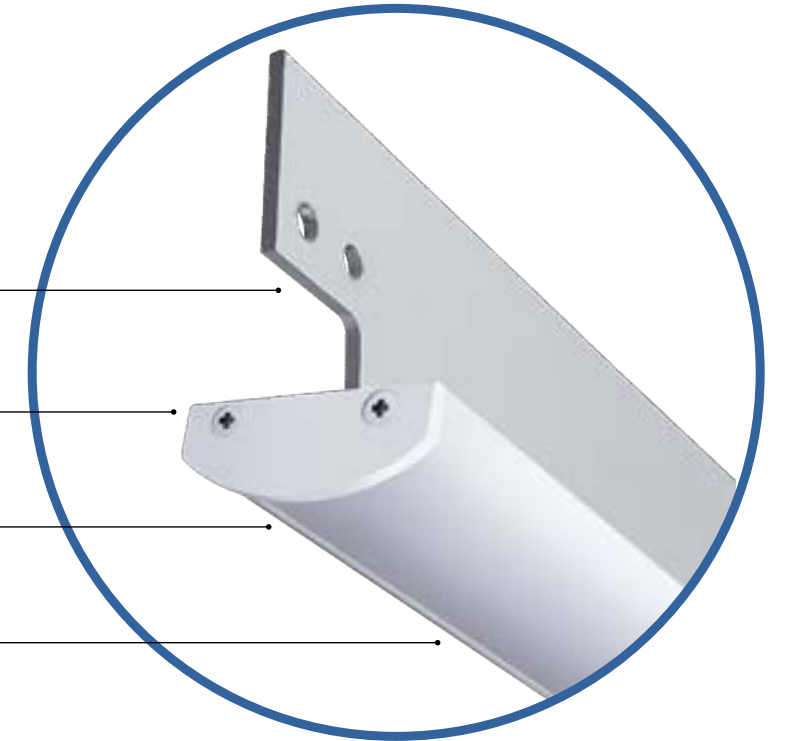

SLOT GRID-MOUNT

Links Directly Into Main Grid & Provides Adjustable Connectors to Meet the Height & Width of the Existing Grid System





HOOK GRID-MOUNT

Hooks Over the Top Plate of the Existing Grid & Provides Adjustable Connectors to Meet the Height & Width of the Grid System

PRODUCT DETAILS



DIMENSIONS

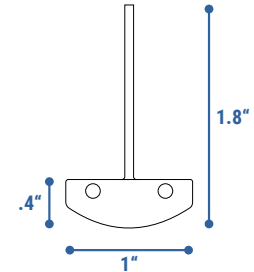

ORDERING GUIDE

MODEL	LENGTH	WATTAGE	COLOR TEMPERATURE (CCT)	LENS	MOUNTING	MODEL	POWER SUPPLY
GL				WH	G1	GL	
	2 FEET	10W	30K 3000K - WARM WHITE	WH WHITE	G1 15/16" T-Grid		PS60W 60-WATT
	4 FEET	20W	35K 3500K - NEUTRAL WHITE		CONSULT FACTORY FOR 9/16" T-Grid OPTIONS		PS96W 96-WATT
			40K 4100K - NEUTRAL WHITE				
			50K 5000K - COOL WHITE				

WIRING DIAGRAM

