



PFX-5119
Backlit LED Flat Panel



ELECTRIC CHARACTERISTIC

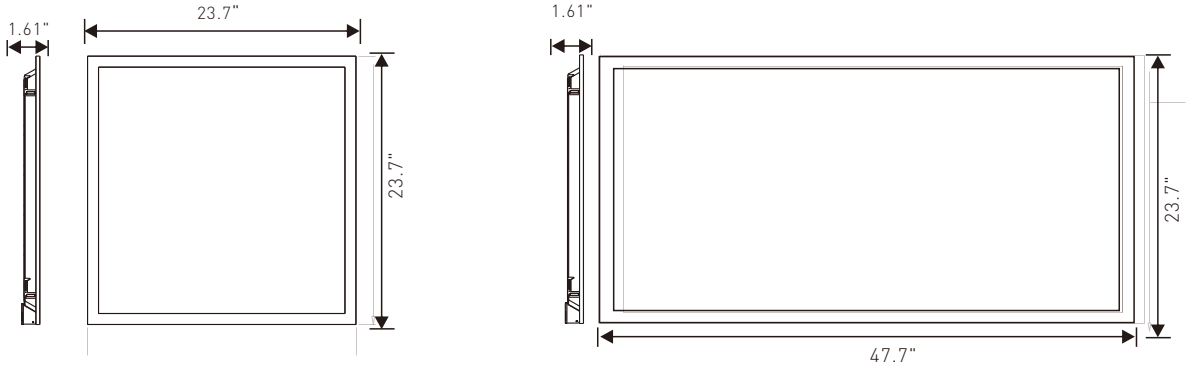

DISTRIBUTION DIAGRAM

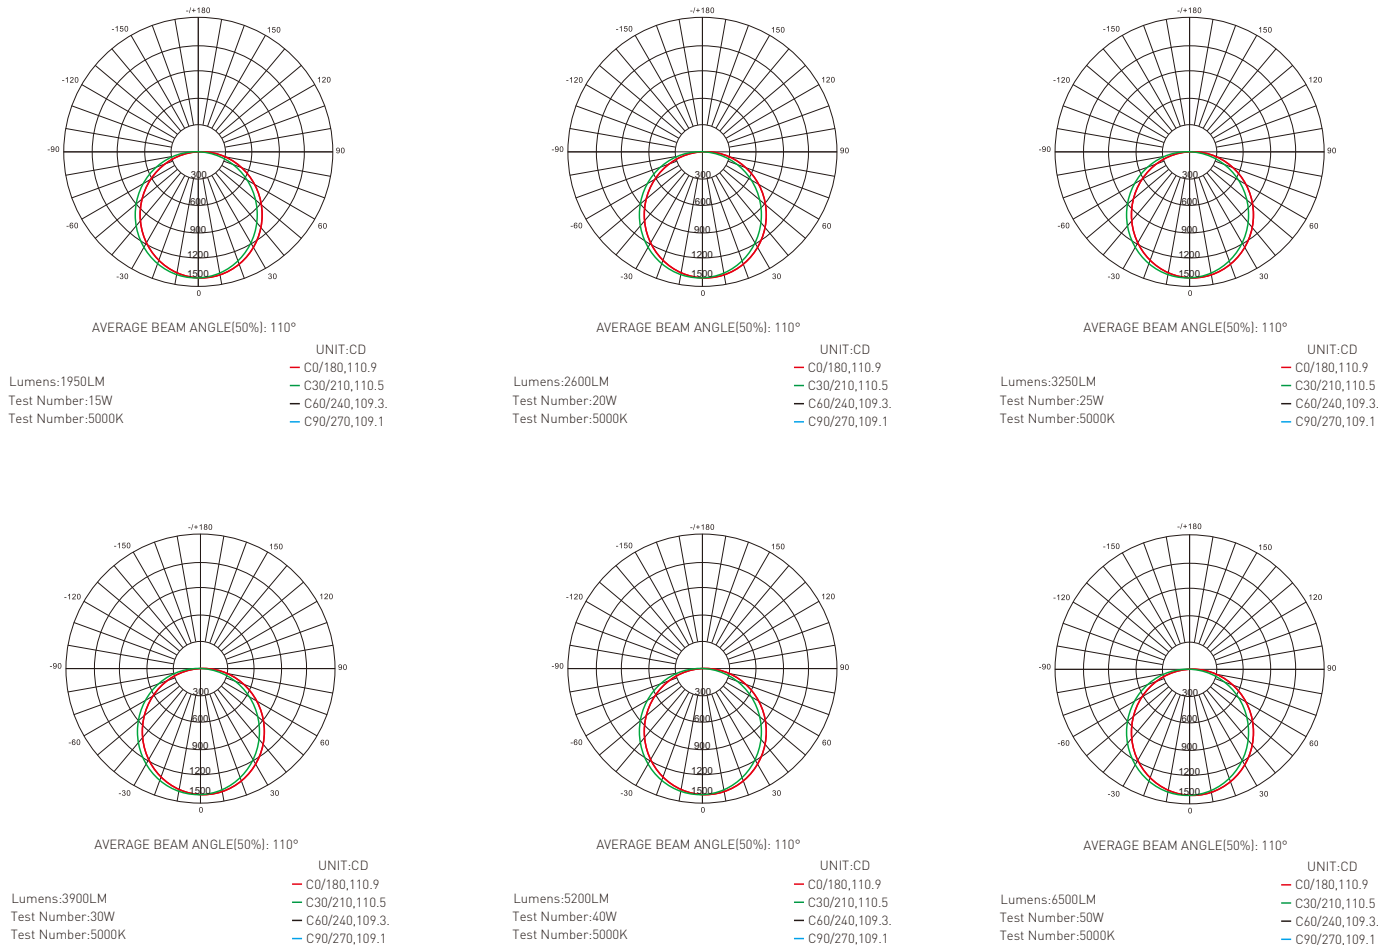


Disclaimer:
 Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5119

Backlit LED Flat Panel




DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%): 110°

Lumens:7800LM
Test Number:60W
Test Number:5000K

UNIT:CD
- C0/180,110.9
- C30/210,110.5
- C60/240,109.3
- C90/270,109.1




AVERAGE BEAM ANGLE(50%): 110°


Lumens:9360LM
Test Number:72W
Test Number:5000K

UNIT:CD
- C0/180,110.9
- C30/210,110.5
- C60/240,109.3
- C90/270,109.1


INSTALL INSTRUCTION




STEP 1: Remove boards as drawing




STEP 2: Put the lamp on the ceiling

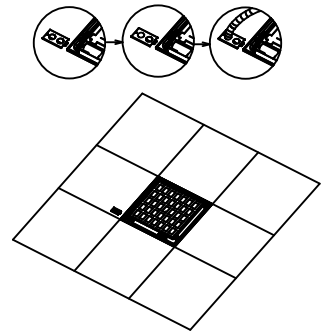


STEP 3: Open the cover of junction box with tool knock off the piece of top Install serpentine coil in junction box




STEP 4: Connect wires with P2 P3 nuts Refer the wiring diagram



T-bar clips should be bent out to provide additional safety and support.



STEP 5: Lock the lamp on frameworks



STEP 6: Put the board back; and check again

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.