

INSTALLATION INSTRUCTION SHEET

DCST - FULL CUT OFF

INSTALLATION INSTRUCTIONS

IMPORTANT SAFEGUARDS


When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. To reduce the risk of electrical shock, turn off power supply before installation or servicing.
2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician. .

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

TO INSTALL:

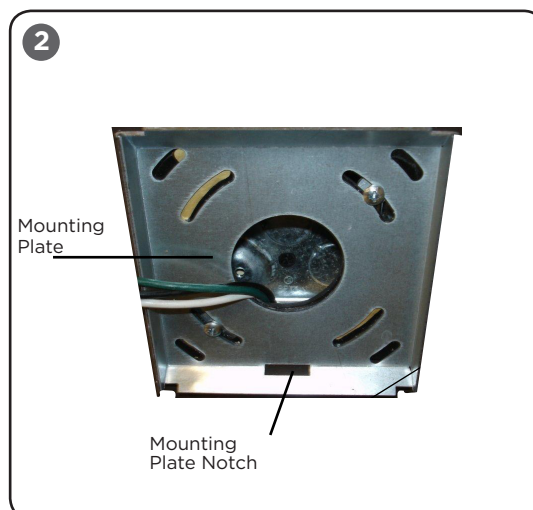

WALL MOUNTING

STEP 1:

Remove the mounting plate from the mounting surface of the luminaire base by loosening (2) hex bolts. See **Figure 1**.

STEP 2:

Apply silicone to surface area around junction box.

STEP 3:

Apply mounting plate over junction box and secure using customer supplied hardware.

NOTE: Apply mounting plate with notch in the plate on the bottom. See **Figure 2**.

STEP 4:

Locate the air craft cable on the back of the luminaire and attach the "S" hook to the mounting plate and carefully let fixture hang.

STEP 5:

Using customer supplied 90°C minimum rated wire connectors, make the following electrical connections in the mounting box or junction box.

- a. Connect the black fixture lead to the voltage supply lead
- b. Connect the white fixture lead to the neutral supply lead
- c. Connect the green or green/yellow ground lead to the supply ground lead.

STEP 6:

Lower the luminaire over the mounting plate, careful not to pinch any wires.

STEP 7:

Secure fixture by tightening the (2) hex bolts that were loosened in Step 1 on the bottom of the luminaire. See **Figure 1**.