

# DC545

LED FLOODLIGHT LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 18 1025



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**COMPACT, HEAVY-DUTY HOUSING**

The DC545 is a 9" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The DC545 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

**120-277V STANDARD    TYPE V DISTRIBUTION**

**PRODUCT APPLICATIONS**

- Parking Lots
- Playgrounds
- Walkways
- Parks & Recreational Fields
- Buildings
- Loading Docks
- Signage

**ORDERING GUIDE**

Sample Part # DC545 - 12W - 30K - BZ - PT

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC545			BZ	
	12W	30K 3000K - WARM WHITE	BZ BRONZE	PT POST TOP FITTER
	24W	40K 4000K - NEUTRAL WHITE		D1 0-10V DIMMING
	36W	50K 5000K - COOL WHITE		
	48W			


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.72	3000K	1,408.25	110.71	PREMIUM
12W	12.72	4000K	1,478.66	116.25	PREMIUM
12W	12.72	5000K	1,552.60	122.06	PREMIUM
24W	23.68	3000K	2,816.50	118.94	PREMIUM
24W	23.68	4000K	2,957.32	124.89	PREMIUM
24W	23.68	5000K	3,105.19	131.13	PREMIUM
36W	34.27	3000K	4,224.75	123.28	PREMIUM
36W	34.27	4000K	4,435.99	129.44	PREMIUM
36W	34.27	5000K	4,657.79	135.91	PREMIUM
48W	45.70	3000K	5,633.00	123.26	PREMIUM
48W	46.60	4000K	5,914.65	126.92	PREMIUM
48W	46.60	5000K	6,210.38	133.27	PREMIUM

**PRODUCT DIMENSIONS**

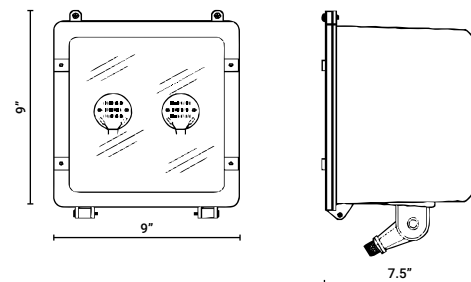

**POWER**

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.