

DCST

CUT-OFF LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 18 1025



QUICK SHIP

FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCST is a 14" Trapezoid Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DCST can be Directly Mounted over an Existing 4" Outlet Box with a 4" x 4" Gasketed Wall Plate

120-277V STANDARD TYPE V DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.


ORDERING GUIDE Sample Part # DCST - 12W - 30K - BZ - EM

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCST			BZ	
	12W	30K 3000K - WARM WHITE	BZ BRONZE	D1 0-10V DIMMING
	24W	40K 4000K - NEUTRAL WHITE		EM EMERGENCY BATTERY PACK*
	36W	50K 5000K - COOL WHITE		*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	48W			
	60W			
	72W*			
		QUANTITY	SHIPS	
		1-5 Pieces (Before 11AM EST)	Same Day	
		5-25 Pieces	3 Days	
		25-100 Pieces	1 Week	

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.65	3000K	1,530.00	120.95	PREMIUM
12W	12.65	4000K	1,606.50	127.00	PREMIUM
12W	12.65	5000K	1,686.83	133.35	PREMIUM
24W	23.68	3000K	3,060.00	129.22	PREMIUM
24W	23.68	4000K	3,213.00	135.68	PREMIUM
24W	23.68	5000K	3,373.65	142.47	PREMIUM
36W	34.27	3000K	4,147.00	121.01	PREMIUM
36W	34.27	4000K	4,354.35	127.06	PREMIUM
36W	34.27	5000K	4,572.07	133.41	PREMIUM
48W	45.80	3000K	5,529.33	120.73	PREMIUM
48W	45.80	4000K	5,805.80	126.76	PREMIUM
48W	45.80	5000K	6,096.09	133.10	PREMIUM
60W	56.83	3000K	6,911.67	121.62	PREMIUM
60W	56.83	4000K	7,257.25	127.70	PREMIUM
60W	56.83	5000K	7,620.11	134.09	PREMIUM
72W	67.65	3000K	8,294.00	122.60	PREMIUM
72W	67.65	4000K	8,708.70	128.73	PREMIUM
72W	67.65	5000K	9,144.14	135.17	PREMIUM

PRODUCT DIMENSIONS

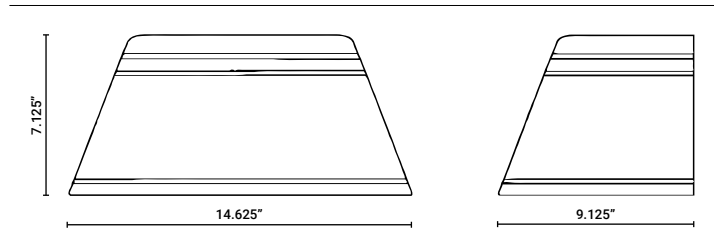

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.