

# CV303

LED CANOPY LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 12 2020



### COMPACT, HEAVY-DUTY HOUSING

The CV303 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The CV303 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

### 120-277V STANDARD TYPE VS DISTRIBUTION

### OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option

### PRODUCT APPLICATIONS

- Building Canopy
- Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # CV303 - 24W - 30K - BZ - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV303			BZ	
	24W 24 WATTS	30K 3000K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR*
	36W 36 WATTS	40K 4000K - NEUTRAL WHITE		D1 0-10V DIMMING
	48W 48 WATTS	50K 5000K - DAYLIGHT		EM EMERGENCY BATTERY PACK*
	60W 60 WATTS			*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	72W 72 WATTS*			
				QUANTITY
				SHIPS
				1-5 Pieces (Before 11AM EST)
				5-25 Pieces
				25-100 Pieces
				Same Day
				3 Days
				1 Week

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMEN	EFFICACY	DLC LISTING
24W	23.54	3000K	2,865.00	121.71	PREMIUM
24W	23.54	4000K	2,950.95	125.36	PREMIUM
24W	23.54	5000K	3,039.48	129.12	PREMIUM
36W	34.27	3000K	4,405.69	128.56	PREMIUM
36W	34.27	4000K	4,537.86	132.41	PREMIUM
36W	34.27	5000K	4,674.00	136.39	PREMIUM
48W	46.60	3000K	5,671.58	121.71	PREMIUM
48W	46.60	4000K	5,841.73	125.36	PREMIUM
48W	46.60	5000K	6,016.98	129.12	PREMIUM
60W	56.83	3000K	6,916.65	121.71	PREMIUM
60W	56.83	4000K	7,124.15	125.36	PREMIUM
60W	56.83	5000K	7,337.87	129.12	PREMIUM
72W	67.26	3000K	8,156.00	121.26	PREMIUM
72W	67.26	4000K	8,400.68	124.90	PREMIUM
72W	67.26	5000K	8,652.70	128.65	PREMIUM

### PRODUCT DIMENSIONS

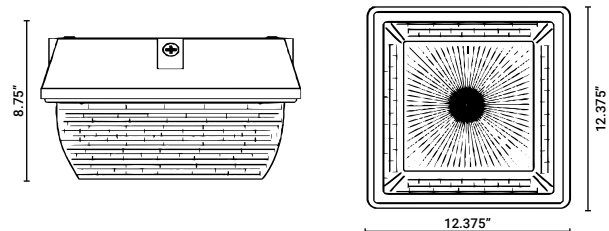

### POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.