

DC150

LED WALLPACK LUMINAIRE

PROJECT
NOTES

DATE

TYPE



REV: 12 2020



HEAVY-DUTY HOUSING

The DC150 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC150 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE IV DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE


Sample Part # DC150 - 12W - 30K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC150			BZ	
	12W 12 WATTS	30K 3000K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W 24 WATTS	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
	36W 36 WATTS	50K 5000K - DAYLIGHT		MS MOTION SENSOR*
	48W 48 WATTS			D1 0-10V DIMMING
	60W 60 WATTS			*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	72W 72 WATTS*			
				QUANTITY
				1-5 Pieces (Before 11AM EST)
				5-25 Pieces
				25-100 Pieces
				SHIPS
				Same Day
				3 Days
				1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY
12W	12.72	3000K	1457.50	114.58
12W	12.72	4000K	1530.38	120.31
12W	12.72	5000K	1606.89	126.33
24W	23.02	3000K	2915.00	126.63
24W	23.02	4000K	3060.75	132.96
24W	23.02	5000K	3213.79	139.61
36W	34.27	3000K	4372.50	127.59
36W	34.27	4000K	4591.12	133.97
36W	34.27	5000K	4820.68	140.67
48W	46.60	3000K	5588.65	119.93
48W	46.60	4000K	5756.31	123.53
48W	46.60	5000K	5929.00	127.23
60W	56.83	3000K	6719.78	118.24
60W	56.83	4000K	7055.77	124.16
60W	56.83	5000K	7408.56	130.36
72W	67.65	3000K	8252.43	121.99
72W	67.65	4000K	8665.05	128.09
72W	67.65	5000K	9098.31	134.49

PRODUCT DIMENSIONS

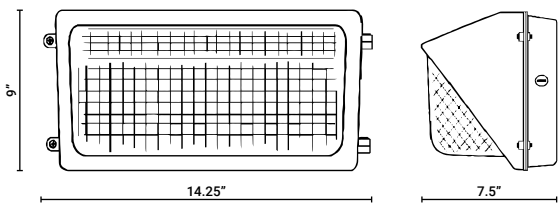

POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.