

# PFX-5502 Thin Die-Cast Aluminum Exit Sign

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



**STANDARD**



**ILLUMINATION**

- Ultra bright, energy efficient, long life Red or Green LEDs.

**ELECTRICAL**

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 2.4V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**MOUNTING**

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


**HOUSING**

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Quick-snap face plate closure.
- Specification-grade, low profile, thin aluminum die-cast design.
- Available in single or double face only.

**WARRANTY / LISTING**

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

**DIMENSIONS**

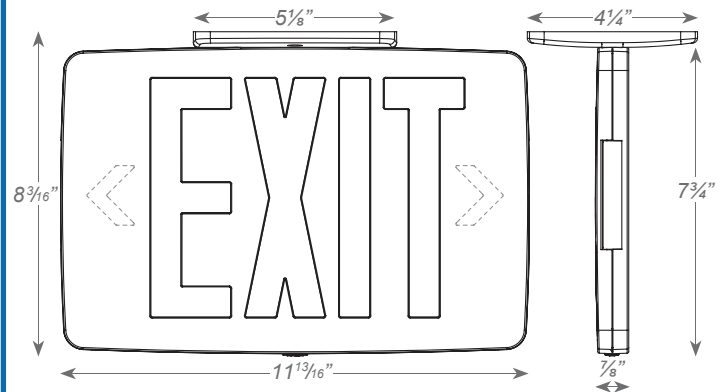

**ORDERING INFORMATION**

Sample Part Number: **PFX5502KZXTEU1RW**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
PFX5502	1 Single Face	R Red	W White	(blank) AC-Only
KZXTEU	2 Double Face	G Green	B Black	EM Battery Backup
			A Aluminum	

Model Number

# PFX-5502 Thin Die-Cast Aluminum Exit Sign

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
PFX5502KZXTEU-RED/GREEN/EM	1.0	1.0	0.10	0.10