

PFX-3113

HALFMOON (DCSHM-UD) LED WALL PACK



FEATURES

UPLIGHT/DOWNLIGHT, HEAVY-DUTY HOUSING

PFX-3113 is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens That Provides a Variety of Uplight and Downlight Options

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

120-277V STANDARD

OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option


PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY
24W	23.68	3000K	2,802.00	118.33
24W	23.68	4000K	2,942.10	124.24
24W	23.68	5000K	3,089.21	130.46
36W	34.27	3000K	4,203.00	122.64
36W	34.27	4000K	4,413.15	128.78
36W	34.27	5000K	4,633.81	135.21
48W	46.60	3000K	5,604.00	120.26
48W	46.60	4000K	5,884.20	126.27
48W	46.60	5000K	6,178.41	132.58
60W	56.83	3000K	7,005.00	123.26
60W	56.83	4000K	7,355.25	129.43
60W	56.83	5000K	7,723.01	135.90
72W	69.48	3000K	8,535.00	118.54
72W	69.48	4000K	8,961.75	124.46
72W	69.48	5000K	9,409.84	130.69

DIMENSION (INCHES)

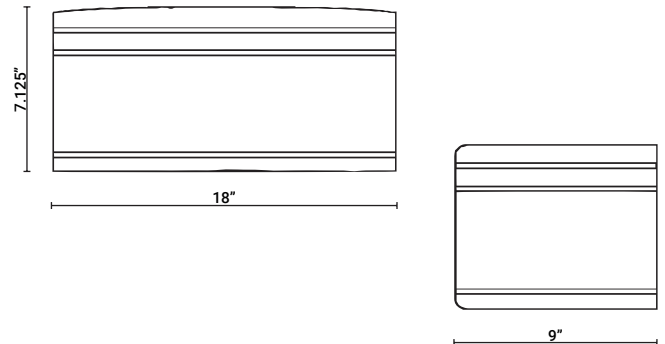

ORDERING GUIDE

Sample Part # PFX-3113 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE UP	WATTAGE DOWN	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PFX-3113	12W				
		12W 12 WATTS	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR
		24W 24 WATTS	30K 3000K - WARM WHITE	WH WHITE	MS-D2 MOTION SENSOR WITH BILEVEL DIMMING
		36W 36 WATTS	35K 3500K - NEUTRAL WHITE	BL BLACK	D1 0-10V DIMMING
		48W 48 WATTS	40K 4000K - NEUTRAL WHITE	SL SILVER	D2 STEP DIMMING
		60W 60 WATTS	50K 5000K - COOL WHITE	CC CUSTOM COLOR	EM EMERGENCY BATTERY PACK
			57K 5700K - DAYLIGHT		V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH EM OR MOTION SENSOR-

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purpose the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.