

PFX-5609

NSF Certified Food Safety Light with Selectable CCT and Lumen



INTRODUCTION

- PFX-5609 series vapor tight luminaire features a slim and modern design. It has best-in-class performance at up to 150lm/w output. They feature a smooth dust-proof surface with a watertight seal that can withstand high-pressure wash downs.
- It is also NSF certified for use in food processing and food safety environments. Applications include poultry processing, food & beverage processing, commercial kitchens, and manufacturing facilities.
- PFX- 5609 Series can be surface mounted to the ceiling or wall, or suspended depending on the application. Sensor and emergency battery backups are optional. The sensor with networking wireless control version also supports LLLC HAISEN BLUE and Silvalir.



PRODUCT SPECIFICATION

Construction:

- Rugged and durable construction with plastic housing.

Electrical:

- 0-10V dimmable driver, which can dim from 100%down to off.
- Input voltage AC120-277V for US market,AC120-347V for Canada market, and 50/60Hz.
- 3ft (36") long power cord provided for easier installation. The power cord is in the lamp body and needs to be led out by yourself.

Optics:

- Selectable CCT A 3500K, 4000K or 5000K (Default setting) , CRI >80.
- UV-stabilized, high-impact,frosted polycarbonate lens for uniform light output and high impact resistance.

Finish:

- Housing is permanent pearl gray color.

Mounting:

- Comes standard with surface mounting kit. Pendant mounting kit is optional.

Ambient Temperature:

- -40°F (-40°C) to 113°F (45°C)

Compliances:

- NSF certified for food processing.
- cULus listed for wet locations.
- DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Warranty:

- 5-year limited warranty.

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5609

NSF Certified Food Safety Light with Selectable CCT and Lumen



ORDERING GUIDE

Example: PFX-5607-VTW(165/135/105)W-(35/40/50)KUV-S

Model	Wattage ¹ XXW	CCT ² XXK	Input Voltage ³ AA	Sensor Y
PFX-5609-VTW	(165/135/105)W	35/40/50K=3500/4000/5000K	UV=120-277Vac LV=120-347Vac	S=with sensor blank=without sensor


Note: 1.(165/135/105)W=165W, 135W, 105W Selectable, 165W default setting.
2.(35/40/50)K=3500K, 4000K, 5000K Selectable, 5000K default setting.
3.The Input Voltage AC120-277V is for US Market, AC120-347V is for Canada Market.

PERFORMANCE DATA

Lumen values are based on 120V AC input product configuration, contact for performance data on any configura ons not shown here.

Model	Lumen Level	Wattage Selectable	Nominal CCT	CCT Selectable	Lumens	Watts	LPW	CRI
PFX-5609-VTW(165/135/105)W-(35/40/50)KAA-Y	1	YES	3500K	YES	16,900	105	161	>80
			4000K		18,650	105	178	
			5000K		17,250	105	165	
	2		3500K		20,900	135	155	
			4000K		23,100	135	171	
			5000K		21,350	135	158	
	3		3500K		24,750	165	150	
			4000K		27,400	165	166	
			5000K		25,350	165	154	

POWER SELECTION AND CCT SLECTION CAPABILTIY

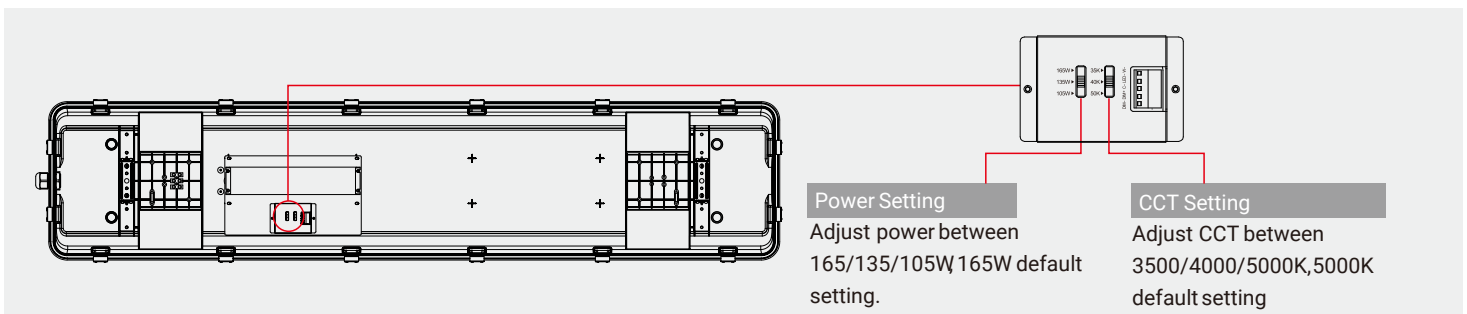

Note: Before Setting Power & CCT, release latches by pulling top of latch away from housing. Gently squeeze the buckle in and take out the PCB board (be careful not to touch the LEDs)

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5609

NSF Certified Food Safety Light with Selectable CCT and Lumen



ACCESSORIES

Sensor

Field-Installable/ Field-Use ONLY (purchased separately)

	HDO9VR-PH Screw-in PIR Sensor		HSE-BSP9H-1 Screw-in PIR Sensor (Networking Wireless Control Version)
	HD07VRC2 Receptacle for Screw-in Sensor		HD06R Remote Control


Emergency Battery Backup

Factory-Installable OR Field-Installable
(field-installable purchased separately)

	PFX-5609-EBB017-15WDC Emergency Battery Backup EMB15YY-260 -15W/90min, for X- VTW, at AC120-277V/347V
--	--

Mounts and Brackets


Field-Installable (field-installable purchased separately)

	PFX-5609-SPM-A-VTL Suspension Mounting Kit - 2pcs
--	--

ELECTRICAL DATA

Model Series	Wattage(W)	Current (A)				
		Input Voltage (V)				
		120	208	240	277	347
PFX-5609 VTW(165/135/105)W	105	0.97	0.56	0.49	0.42	0.34
	135	1.25	0.72	0.63	0.54	0.43
	165	1.53	0.88	0.76	0.66	0.53

DIMENSIONS

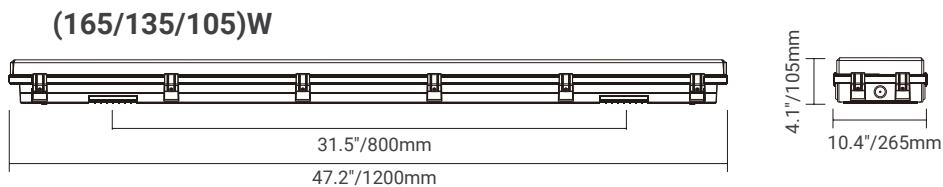

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5609

NSF Certified Food Safety Light with Selectable CCT and Lumen



SHIPPING INFORMATION

Model	Carton Size (in)	G.W. (lbs)	Per carton (pcs)	20GP (pcs)	40HQ (pcs)
PFX-5609-VTW(165/135/105)W	48.43 x 12.01 x 5.91	16.49	1	419	1,153

Note: The packaging data can sometimes be outdated or incomplete. For the most reliable information, please reach out to us directly.

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.